

Contents

Heavy Duty	P3	Compound Mitre Saw
Freedom Concept	P4 - 5	Mitre Saw Stand
3.6 V Li-lon	P6	Table Saw Stand
10.8 V Li-lon	P6	Mitre Saw
12 V Li-lon	P7 - 8	Foam Cutter
14.4 V Li-lon	P8	Planer
18 V Li-lon	P8 - 10	Orbital Sander
36 V Li-lon	P10 - 11	Eccentric Sander
10.8 V / 12 V Battery Pack	P11	Belt Sander
14.4 V Battery Pack	P11	Polisher
18 V Battery Pack	P11	Blower
36 V Battery Pack	P11	Hot Air Gun
Charger	P11	Mini Router / Trimmer
10.8 V / 12 V / 14.4 V / 18 V Starter Kit	P11	Wet & Dry Vacuum Cleaner
L-BOXX	P11	Cordless Optical Scope
Drill	P11 - 12	Laser Rangefinder
Impact Drill	P12	Detector
Multi-Cutter	P12 - 13	Thermo Detector
Rotary Hammer	P13	Line Laser
Magnetic Drill Stand	P13	Surface Laser
Rotary Hammer with SDS-Max	P14	Electronic Line Laser
Dust Extractor	P14	Point Laser
Demolition Hammer	P14 - 15	Combi Laser
Straight Grinder	P15	Optical Level
Angle Grinder	P15 - 16	Rotation Laser Level
Impact Wrench	P16	Angle Measurer
Stirrer / Mixer Drill	P17	Digital Inclinometer
Shear	P17	Tripod
Bench Grinder	P17	Laser Receiver
Nibbler	P17	Measuring Rail
Marble Cutter	P17	Telescopic Pole
Diamond Wheel Cutter	P17	Optical Level Measuring Rod
Circular Saw	P17	Universal Holder
Sabre Saw	P17	High Pressure Washer (Suitable for Home Use)
Jigsaw	P17 - 18	High Pressure Cleaner (Suitable for Industrial Use)
Dry Cutter	P18	Bosch 110V Power Tools
Cut off Machine	P18	Carbon Brush Guidelines
Slide Mitre Saw	P18	Warranty
Table Saw	P18	



All tools comes with **Full Warranty***! Includes Wear & Tear Parts!

www.bosch-pt.com.sg

REFE Repair Costs!!



Bosch Heavy Duty Power Tools are entitled to 1 year Full Warranty, excluding batteries and chargers which are entitled to 6 months warranty. Full Warranty is exclusively available at Powerwell Service Centre only.

Bosch reserves the right to amend the terms & conditions or withdraw the promotion at its sole discretion without prior notice.

	HEAVY DUTY MODELS	5
GAS 10.8 V-LI (Bare Unit Only)	GDS 18 V-EC	GSH 5 CE
GAS 12 V-LI	GDS 18 V-LI	GSH 9 VC
GAS 18 V-LI (Bare Unit Only)	GDS 18 V-LI HT	GSR 10.8 V-EC
GAS 11-21	GDS 30	GSR 10.8-2-LI
GBG 6	GDX 18 V-EC	GSR 12 V-EC
GBG 8	GDX 18 V-LI (Bare Unit Only)	GSR 12-2-LI
GBG 35-15	GEX 125-1 AE	GSR 12-15 FC
GBG 60-20	GGS 18 V-LI (Bare Unit Only)	GSR 14.4-2-LI
GBH 18 V-EC	GGS 28 C	GSR 18 V-EC
GBH 2-23 REA	GGS 28 LC	GSR 36 VE-2-LI
GBH 2-24 RE / DRE	GGS 6 S	GSS 10.8 V-EC
GBH 2-26 DFR	GHO 10-82	GSS 18 V-LI (Bare Unit Only)
GBH 2-26 DRE	GKM 18 V-LI	GSS 280 AE
GBH 2-26 RE (also available in 110V)	GKS 10.8 V-LI (Bare Unit Only)	GSS 280 AVG
GBH 2-28 DFV	GKS 12 V-LI (Bare Unit Only)	GST 10.8 V-LI (Bare Unit Only)
GBH 3-28 DFR	GKS 18 V-LI (Bare Unit Only)	GST 12 V-LI (Bare Unit Only)
GBH 36 V-EC Compact	GMR 1	GST 18 V-LI (Bare Unit Only)
GBH 4-32 DFR (also available in 110V)	GNA 2.0	GST 25 M (also available in 110V)
GBH 5-40 D (also available in 110V)	GOP 10.8 V-LI	GST 80 PBE
GBH 8-45 D	GOP 12 V-LI	GTS 10 J
GBH 18V-26 (Bare unit only)	GOP 18 V-EC (Bare Unit Only)	GUS 10.8 V-LI (Bare Unit Only)
GBH 18V-26 + GDE 18V-16	GOP 12 CE	GWB 10.8 V-LI
GBL 18 V-120 (Bare Unit Only)	GOP 250 CE	GWI 10.8 V-LI
GBL 800 E	GOP 30-28	GWI 12 V-LI (Bare Unit Only)
GBM 10 RE	GRW 12 E	GWS 7-100
GBM 13 HRE 'High Torque'	GSA 10.8 V-LI	GWS 7-100 ET
GBM 13 RE	GSA 1100 E (also available in 110V)	GWS 7-100 T
GBM 13-2	GSA 12 V-LI (Bare Unit Only)	GWS 750-100
GBM 16-2 RE	GSA 1300 PCE	GWS 8-100 C
GBM 23-2 E	GSA 18V-32 (Bare Unit Only)	GWS 8-100 CE
GBM 32-4	GSA 36 V-LI	GWS 8-100 Z (also available in 110V)
GBS 75 A	GSB 13 RE	GWS 900-100
GCD 12 JL	GSB 14.4-2-LI	GWS 10.8-76 V-EC (Bare Unit Only)
GCM 10 M	GSB 16 RE (also available in 110V)	GWS 11-125 (also available in 110V)
GCM 10 MX	GSB 18 V-EC (Bare Unit Only)	GWS 12-125 CI
GCM 10 S	GSB 18-2-LI	GWS 13-125 CI
GCO 14-24 J	GSB 20-2	GWS 14-125 INOX
GCO 2000 (also available in 110V)	GSB 20-2 RE	GWS 15-125 CI
GDM 13-34 (also available in 110V)	GSB 21-2 RCT	GWS 15-125 INOX
GDR 10.8 V-EC	GSC 2.8	GWS 15-150 CI
GDR 10.8-LI	GSH 11 E	GWS 17-125
GDR 12 V-EC	GSH 11 VC	GWS 17-150
GDR 12-LI	GSH 16-30	GWS 18 V-LI
GDR 14.4 V-LI	GSH 27 VC	GWS 20-180 (also available in 110V)
GDS 18 E	GSH 5 (SDS MAX)	GWS 20-230
* Bosch Heavy Duty Power Tools are entitled to 1-v	ear warranty except for hot air guns hatteries and	chargers which are entitled to 6-months warranty



The **Freedom** Concept

The freedom concept provides the freedom to choose cordless tools, batteries, chargers, and carrying cases exactly according to your needs. You are now free to choose.



Bosch Lithium-Ion Cordless Tools Range



INNOVATIVE BOSCH CORDLESS TECHNOLOGY



Kick Back Stop detects sudden movements and stop tool rotation





ETP protects your tool from Rain & Dust





CHOOSE YOUR **OWN COMBINATION**










14,4 V	olt
light series	robust series
GDR 1440-LI Set GSR 1440-LI Set GSR 1440-LI Set	GDR 14.4 V-LI

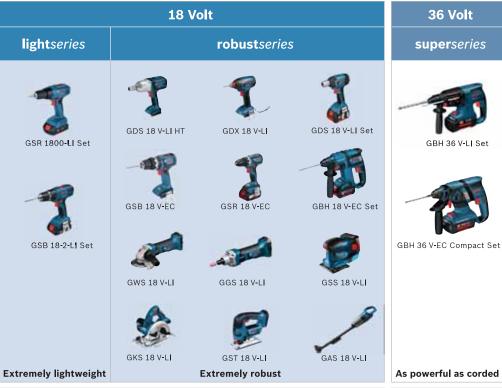









EMP protects the motor against overload and automatically shuts it down in case of stalling





2 X Lifetime up to 30% more runtime



EC Brushless Motor No brush sparking due to electrical switch by electrics



DC Motor Brush sparking at every mechanical switch operation



ECP prevents your battery from deep discharge, overheating, overload



3.6 V Li-Ion

IXO₃ **Cordless Screwdriver**







Capacity

Max. Screw Dia.	: 5 mm
Max. Torque (Hard/Soft joint)): 4 / 3 Nm
No-load Speed	: 0 - 180 rpm
Battery Voltage	: 3.6 V / 1.3 Ah
Weight	: 0.3 kg

Spare Parts

Charger 2 607 225 419

GSR 3,6 V-LI BitDrive **Cordless Screwdriver**





Capacity

Max. Screw Dia.	: 5 mm
Max. Torque	: 4.5 Nm
No-load Speed	: 210 rpm
Battery Voltage	: 3.6 V / 1.5 Ah
Charging Time	: 4 hours
Weight	: 0.5 kg

GSR 3.6 V-LI ProDrive Cordless Screwdriver











Cupacity	
Max. Screw Dia.	: 5 mm
Max. Torque	: 7 Nm
No-load Speed	: 0 - 250 rpm
Battery Voltage	: 3.6 V / 1.3 Ah
Weight	· 0.5 kg

10.8 V Li-lon

GDR 10.8 V-EC Cordless Impact Driver





Capacity	
Tool Holder System	n: 1/4" Hex (6.35 mm)
No-load Speed	: 0 - 1,200 / 2,600 rpm
Impact Rate	: 0 - 2,700 / 3,100 bpm
Max. Torque	: 110 Nm
Battery Voltage	: 10.8 V / 2.0 Ah
Weight	: 0.95 kg

Spare Parts

GDS 10.8 V-EC Cordless Impact Wrench



Capacity

Max. Torque (hard)	: 115 Nm
No-load Speed	: 0 - 1,200 / 2,600 rpm
Impact Rate	: 0 - 1,600 bpm
Battery Voltage	: 10.8 V / 2.0 Ah
Toolholder	: 3/8" external square
Weight	: 0.95 kg

Spare Parts

Electronic Module 1 607 233 581 Brushless DC Motor 2 609 199 661

GOP 10.8 V-LI **Cordless Multi-Cutter**



□ S Capacity

Oscilliation angle	
on left / right	: 1.4°
No-load Speed	: 5,000 - 20,000 rpm
Battery Voltage	: 10.8 V / 2.0 Ah
Weight	: 1.0 kg

Spare Parts

2 609 110 797 Screw 2 609 199 180 Motor

GSA 10.8 V-LI **Cordless Sabre Saw**



Capacity

Stroke speed	: 0 - 3,000 min
Stroke length	: 14.5 mm
Pipe diameter	: 50 mm
Wood	: 65 mm
Battery Voltage	: 10.8 V / 2.0 Ah
Weight	· 1 2 kg

Spare Parts

1 619 P08 652 Motor Electronic Module 1 619 P08 618

GSB 1080-2-LI Cordless Impact Drill Driver



Capacity

Drilling Dia. In Steel :	6 mm
In Wood :	19 mm
In Masonry:	8 mm
Max. Torque (Hard / Soft) :	28 / 11 Nm
Max. Screw Dia. :	7 mm
No-load Speed :	0-400 / 1,300 rpm
Battery Voltage :	10.8 V / 1.5 Ah
Weight :	1.1 kg

Spare Parts

Motor 1 600 A00 DM8 Electronic Module 2 609 125 169 1 600 A00 DM7 Gear Box

GSR 1080-2-LI Cordless Drill / Screwdriver



Capacity

Drilling Dia. In Steel : 6 mm		
In Woo	d: 19 mm	
Max. Torque (Hard/Soft): 28 / 11 Nm		
Max. Screw Dia.	: 7 mm	
No-load Speed	: 0-430/0-1,600 rpm	
Battery Voltage	: 10.8 V / 1.5 Ah	
Weight	: 1.0 kg	

GSR 10.8-2-LI Cordless Drill / Screwdriver



Capacity

	Drilling Dia. In Steel	: 10 mm
	In Wood	: 19 mm
	Max. Torque	: 30 Nm
	No-load Speed	: 0 - 350 / 1,300 rpm
	Battery Voltage	: 10.8 V / 2.0 Ah
	Weight	: 0.95 kg

Spare Parts

Motor	2 609 199 258
Electronic Module	1 607 233 485
Gear Box	2 609 199 786
Chuck	2 609 110 967

GSR 10.8 V-EC Cordless Drill / Screwdriver



Capacity

Drilling Dia.: In Steel	: 10 mm
In Wood	: 30 mm
Max. Torque (hard/soft)	: 20 / 18 Nm
No-load Speed	: 0 - 400 / 1,300 rpn
Battery Voltage	: 10.8 V / 2.0 Ah
Clutch Settings	: 20+1
Chuck Capacity	: 10 mm
Weight	: 0.9 kg

Spare Parts

Electronic Module 1 607 233 568 2 609 111 562

GWS 10.8-76 V-EC (Bare Unit Only) **Cordless Angle Grinder**



Capacity

No-load Speed	: 19,500 rpm
Battery Voltage	: 10.8 V
Grinding Spindle Thread	: M5
Bore Size, Diameter	: 10 mm
Weight	: 0.9 kg

12 V Li-lon

GSB 120 Cordless Impact Drill Driver



Capacity

- apacity	
Drilling Dia. In Steel	: 6 mm
In Wood	: 19 mm
In Masonr	ry : 8 mm
Max. Torque (Hard / Sof	t joint): 28 / 11 Nm
Max. Screw Dia.	: 7 mm
No-load Speed	: 0 - 400 / 1,300 rpm
Battery Voltage	: 12 V / 1.5 Ah
Weight	: 1.1 kg

Spare Parts

2 609 125 169 Switch Chuck 2 609 111 312

GSR 120-LI Cordless Drill / Screwdriver



Capacity

	Drilling Dia. In Steel	: 10 mm
	In Wood	: 20 mm
	Max. Torque (Hard / S	Soft joint): 30 / 13 Nm
	Max. Screw Dia.	: 7 mm
	No-load Speed	: 0 - 380 / 1,300 rpm
	Battery Voltage	: 12 V / 1.5 Ah
	Weight	: 1.0 kg

Spare Parts

Switch	2 609 125 169
Motor	2 609 199 258

GKS 12 V-LI (Bare Unit Only) Cordless Circular Saw





Capacity		
No-load Speed	: 1,400 rpm	
Depth of Cut - 90°	: 26.5 mm	
Bore Diameter	: 15 mm	
Max. Bevel	: 45°	
Maight	1 / 1/2	

No-load Speed

Battery Voltage Weight

Capacity Oscilliation

GOP 12 V-LI Cordless Multi-Cutter

DUTY

Screw	2 609 110 797
Motor	2 600 100 100

angle on left / right $: 1.4^{\circ}$

: 5,000 - 20,000 rpm

: 12 V / 2.0 Ah

: 1.0 kg

No-load Speed	: 1,400 rpm
Depth of Cut - 90°	: 26.5 mm
Bore Diameter	: 15 mm
Max. Bevel	: 45°
Weight	: 1.4 kg

1 619 P11 537

1 619 P11 536

Spare Parts

Screw	2 609 110 797
Motor	2 609 199 180

GWI 12 V-LI (Bare Unit Only) Cordless Angle Driver











Capacity Drilling Dia.: In Steel : 8 mm In Wood : 10 mm Max. Torque : 13 / 5 Nm Max. Screw Dia. 5 mm : 0 - 585 rpm

Weight	1.1	kg	١

Spare Parts

No-load Speed

PC Board	2 609 120 228
DC Motor	2 609 199 131

GST 12 V-LI (Bare Unit Only) **Cordless Jigsaw**





Capacity

oupuoity	
No-load Stroke Rate	: 1,500 - 2,800 spm
Stroke Length	: 18 mm
Cutting Capacity:	
- in Wood	: 70 mm
- in Aluminium	: 3 mm
- in Non-alloy Steel	: 3 mm
Weight	: 1.5 kg

Spare Parts

Motor	1 619 D10 586
Nozzle	1 619 P10 585

GAS 12 V-LI Cordless Vacuum Cleaner



Spare Parts

Suction Nozzle

Parallel-Guide





Capacity

Filter Surface	:	408 cm ²
Max. Airflow	:	12 l/sec
Max. Ventilaling Pressure	:	45 mbar
Battery Voltage	:	12 V
Weight	:	0.9 kg

Spare Parts

Filter	1 600 A00 2PS
Nozzle	1 600 A00 2PP

GDR 120-LI Cordless Impact Driver



Max. Torque	:	100 Nm
No-load Speed	:	0 - 1,300 / 2,600 rpm
Rated Impact Rate	:	2,800 - 3,300 bpm
Bit Holder	:	1/4" internal hexagon
Battery Voltage	:	12 V / 1.5 Ah
Weight	:	1.05 kg

GDR 12-LI Cordless Impact Driver





Capacity	
Tool Holder System	: 1/4" Hex (6.35mm)
No-load Speed	: 0 - 2,600 rpm
Impact Rate	: 0 - 3,100 bpm
Max. Torque	: 105 Nm
Voltage	: 12 V / 2.0 Ah
Weight	: 0.96 kg

Spare Parts Motor 2 609 199 281 Electronic Module 1 607 233 378

GDR 12 V-EC Cordless Impact Driver



Capacity

Tool Holder System	:	1/4" Hex (6.35 mm)
No-load Speed	:	0 - 1,200 / 2,600 rpm
Impact Rate	:	0 - 2,700 / 3,100 bpm
Max. Torque	:	110 Nm
Battery Voltage	:	12 V / 2.0 Ah
Weight		0.95 kg

Spare Parts Electronic Module 1 607 233 581 Brushless DC Motor 2 609 199 661

GSA 12 V-LI (Bare Unit Only) **Cordless Sabre Saw**









Capacity

Stroke Speed	: 0 - 3,000 min
Stroke Length	: 14.5 mm
Pipe Diameter	: 50 mm
Wood	: 65 mm
Weight	· 1 2 kg

Spare Parts

Motor 1 619 P08 652 Electronic Module 1 619 P08 618

GSR 12-2-LI Cordless Drill / Screwdriver





Capacity

Drilling Dia. In Steel	: 10 mm
In Wood	: 19 mm
Max. Torque	: 30 Nm
No-load Speed	: 0 - 350 / 1,300 rpm
Battery Voltage	: 12 V / 2.0 Ah
Weight	: 0.95 kg

Motor	2 609 199 258
Electronic Module	1 607 233 485
Gear Box	2 609 199 786
Chuck	2 609 110 967

12 V Li-lon

GSR 12 V-EC Cordless Drill / Screwdriver



Capacity

Drilling Dia.: In Steel	:	10 mm
In Wood	:	30 mm
Max. Torque (hard/soft) :	:	20 / 18 Nm
No-load Speed	:	0 - 400 / 1,300 rpm
Battery Voltage	:	12 V / 2.0 Ah
Chuck Capacity	:	10 mm
Weight	:	0.9 kg

Spare Parts

Electronic Module	1 607 233 568
Motor	2 609 199 654
Chuck	2 609 111 562

GSR 12-15 FC Cordless Drill / Driver



Capacity	
Drilling Dia.: In Steel :	10 mm
In Wood:	19 mm
Max. Torque (hard/soft) :	30 / 15 Nm
No-load Speed :	0 - 400 / 1,300 rpm
Battery Voltage :	12 V / 2.0 Ah
Chuck Capacity :	10 mm
Weight :	0.6 kg

14.4 V Li-Ion

HEAVY

DUTY

GDR 14.4 V-LI Cordless Impact Driver



Capacity	
Tool Holder System	: 1/4" Hex (6.35 mm)
No-load Speed	: 0 - 2,800 rpm
Impact Rate	: 0 - 3,200 bpm
Max. Torque	: 150 Nm
Battery Voltage	: 14.4 V / 4.0 Ah
Weight	: 1.6 kg

GDR 1440-LI

Cordless Impact Driver

Capacity	
Tool Holder System	: 1/4" Hex (6.35 mm)
No-load Speed	: 0 - 2,900 rpm
Impact Rate	: 0 - 3,200 bpm
Max. Torque	: 130 Nm
Battery Voltage	: 14.4 V / 1.5 Ah
Weight	: 1.2 kg

Spare Parts

Carbon Brush 2 609 199 169 2 609 199 313 Motor

Spare Parts

Motor 2 609 199 419 Coupling Half 2 609 199 319

GSR 14.4-2-LI Cordless Drill / Screwdriver



Capacity

Drilling Dia.: In Steel: 10 mm In Wood: 25 mm

Max. Torque (Hard / Soft joint) : 38 / 16 Nm : 0 - 400 / 1,250 rpm : 14.4 V / 2.0 Ah No-load Speed Battery Voltage Weight : 1.3 kg

Spare Parts

Motor	2 609 199 591
Electronic Module	1 607 233 543
Gear Box	2 609 199 786
Chuck	2 609 111 562

GSR 1440-LI Cordless Drill / Screwdriver



Capacity

1	Drilling Dia.: In Steel	: 10 mm
	In Wood	: 25 mm
1	Max. Torque (Hard / S	Soft joint): 30 / 15 Nm
	Max. Screw Dia.	: 7 mm
ı	No-load Speed	: 0 - 420 / 1,400 rpm
	Battery Voltage	: 14.4 V / 1.5 Ah
,	Weight	: 1.3 kg

Spare Parts

Motor	2 609 199 378
Gear Box	2 609 199 337
Switch	2 609 199 475
Chuck	1 619 Y00 824

18 V Li-lon

GSR 1800-LI Cordless Drill / Driver



Capacity

Drilling Dia.: In Steel	: 10 mm
In Wood	: 29 mm
Max. torque (Hard/Sof	ft joint) : 34 Nm
No-load Speed	: 0-400 / 1,300 rpm
Battery Voltage	: 18 V / 1.5 Ah
Torque Settings	: 25
Weight	: 1.4 kg

Spare Parts

Motor	2 609 120 395
Gear Box	2 609 199 337
Switch	2 609 199 464
Chuck	1 619 Y00 824

GSR 180-LI Cordless Drill / Driver



Capacity	
Battery Voltage	: 18 V / 1.5 Ah
Chuck Capacity	: 13 mm
No-load Speed (1s	t gear) : 0 - 450 rpm
(2)	nd gear) : 0 - 1,700 rpm
Torque Settings	: 20+1
Max Screw Dia.	: 10 mm
Max Drilling Wood	/ Steel : 35 / 10 mm
Weight	: 1.6 kg

GDS 18 V-LI Cordless Impact Wrench



Capacity

Torque Max.	: 180 Nm
No-load Speed	: 0 - 2,800 rpm
Impact Rate	: 0 - 3,200 bpm
Screw Diameter	: M6 - M16
Toolholder	: 1/2" External Square
Battery Voltage	: 18 V / 2.6 Ah
Weight	: 1.7 kg

Spare Parts

Carbon Brush	2 609 195 169
Motor	2 609 199 313
Electronic Module	1 607 233 480

GDS 18 V-EC Cordless Impact Driver



Canacity

Capacity	Capacity	
Torque Max.	: 185 Nm	
No-load Speed	: 0 - 2,800 rpm	
Impact Rate	: 0 - 3,200 bpm	
Screw Diameter	: M6 - M16	
Toolholder	: 1/2" External Square	
Battery Voltage	: 18 V / 4.0 Ah	
Weight	: 1.6 kg	

Spare Parts

Motor 2 609 199 548 Electronic Module 1 607 233 470

GDS 18 V-LI HT **Cordless Impact Wrench**



Capacity	
Torque Max.	: 650 Nm
No-load Speed	: 0 - 1,900 rpm
Impact Rate	: 0 - 2,100 bpm
Screw Diameter	: M12 - M20
Toolholder	: 1/2" External Square
Battery Voltage	: 18 V
Weight	: 3.0 kg

Snaro Parte

Spare Farts	
Motor	2 610 943 875
Coupling Half	2 610 943 880
Electronic Module	2 610 016 810

GDX 18 V-LI (Bare Unit Only)



Capacity

Tool Holder	: Hex & Square
No-load Speed	: 0 - 2,800 rpm
Impact Rate	: 0 - 3,200
Max. Torque	: 160 / 180 Nm
Weight	: 1.6 / 1.8 kg

Snaro Parts

Spare Farts		
Carbon Brush	2 609 199 169	
Motor	2 609 199 508	
Electronic Module	1 607 233 480	

18 V Li-Ion

GDX 18 V-EC Cordless Impact Wrench Driver



Capacity

Tool Holder	: Hex & Square
No-load Speed	: 0-2,800 rpm
Impact Rate	: 0-3,200 bpm
Max. Torque	: 185 Nm
Battery Voltage	: 18 V / 4.0 Ah
Weight	: 1.7 kg

Spare Parts

Motor 2 609 199 548 Electronic Module 1 607 233 470

GKM 18 V-LI Cordless Metal Circular Saw





Capacity

-upuo.ty	
Blade Diameter	: 136 mm
Cutting depth (90°)	: 51 mm
Saw Blade Bore Dia.	: 20 mm
No-load Speed	: 3,800 rpm
Battery Voltage	: 18 V / 4.0 Ah
Weight	. 2 9 kg

Spare Parts

Motor 2 610 034 087 Electronic Assembly 2 610 029 995

GKS 18 V-LI (Bare Unit Only) Cordless Circular Saw



Capacity

Blade Diameter	: 165 mm
Max. Cutting Capacities a	at 90°: 51 mm
	45°: 40 mm
Saw Blade Bore Dia.	: 20mm
No-load Speed	: 3,900 rpm
Weight	: 4.1 kg

Spare Parts

Pole Housing	1 615 100 008
Armature	1 619 P01 902
Carbon Brush	2 610 943 623

GOP 18 V-EC (Bare Unit Only) Cordless Multi-Cutter





□ ELECTRONIC

Capacity

Oscillation Angle	
Left / Right	: 2,8°
No-load Speed	: 8,000 - 20,000 rpm
Weight	: 1.95 kg

Spare Parts

Electronic Module 2 609 199 490 Armature Assembly 2 609 199 680

GOP 18 V-28 (Bare Unit Only) Cordless Multi-Cutter







Oscillation Angle	
Left / Right	: 1,4°
No-load Speed	: 8,000 - 20,000 rpm
Weight	: 2.0 kg

GSA 18 V-32 (Bare Unit Only) Cordless Sabre Saw









Capacity

Cutting Depth: In Metal	: 175 mm
In Wood	: 230 mm
No-load Stroke Rate	: 0 / 2,500 min ⁻¹
Orbital Action	: 0 - 1 - 2
Stroke length	: 32 mm
Weight	: 3.5 kg
Pattory Voltago	. 18 V

GSB 180-LI Cordless Impact Drill



Capacity

Max Driffing Masonry	: 10 111111
Max Screw Diameter	: 10 mm
Max Drilling Steel / Wood	: 10 mm / 35 mm
Chuck Capacity	: 13 mm
Torque (Hard / Soft)	: 54 / 21 Nm
No-load Speed (1st gear)	: 0 - 450 rpm
(2nd gear)	: 0 - 1,700 rpm
Battery Voltage	: 18 V / 1.5 Ah
Weight	: 1.6 kg

GSB 18-2-LI Cordless Impact Drill



Capacity

Drilling Dia.: In Steel	: 10 mm
In Wood	: 29 mm
In Mason	ary: 10 mm
Max. Torque (Hard / S	oft joint): 45 / 19 Nm
No-load Speed	: 0 - 500 / 1,450 rpm
Battery Voltage	: 18 V / 2.0 Ah
Weight	: 1.5 kg

Spare Parts

Motor 2 609 199 626 Electronic Module 1 607 233 544 Chuck 2 609 111 312

GSB 18 V-EC (Bare Unit Only) Cordless Impact Drill / Driver



Capacity

| Drilling Dia. In Steel / Wood : 13 / 38 mm | In Masonary : 13 mm | Max. Torque (hard/Soft) : 60 / 31 Nm | No-load Speed : 0 - 600 / 1,900 rpm | Chuck Capacity : 13 mm | Torque Settings : 20+1 | Max. Impact Rate : 25,500 bpm |

: 1.5 kg

Spare Parts

Weight

Stator 1 619 P08 583 Rotor 2 609 199 671

GSR 18 V-EC Cordless Drill / Driver



Capacity

Drilling Dia. In Steel	: 13 mm
In Wood	: 38 mm
Max. Torque (Hard / S	Soft joint) : 60 / 31 Nm
Chuck Capacity	: 13 mm
No-load Speed	: 0 - 600 / 1,900 rpm
Torque Settings	: 20+1
Battery Voltage	: 18 V / 2.0 Ah

Spare Parts

Stator 1 619 P08 583 Rotor 2 609 199 671

GSS 18 V-LI (Bare Unit Only) Orbital Sander





Capacity

Stroke Length	: 28 mm
No-load Orbital Stroke Rate	e: 22,000 opm
No-load Speed	: 11,000 rpm
Oscillating circuit Diameter	: 1.6 mm
Weight	: 1.0 kg

Spare Parts

Spare Parts		
Plate	2 609 101 073	
Felt	2 609 170 230	
Spring	2 609 111 892	

GST 18 V-LI (Bare Unit Only) Cordless Jigsaw





SDS-plus

Capacity	
No-load Stroke Rate	: 2700 spm
Stroke Height	: 23 mm
Cutting Depth In Metal	: 8 mm
In Wood	: 90 mm
Slanted Cuts	: 0 - 45°
Weight Incl. Battery	: 2.4 kg

oparo i ai a	•
Lifting Rod	2 600 780 173
Base Plate	2 601 016 906
Roller Level	2 601 321 077

18 V Li-Ion

GWS 18 V-LI Cordless Angle Grinder











Capacity

Weight

No-load Speed	: 10.000 rpm
Roughing / Cutting Disc,	
Diameter	: 100 mm
Battery Voltage	: 18 V / 3.0 Ah

: 2.3 kg

Spare Parts

Switch 2 607 202 071

GGS 18 V-LI (Bare Unit Only) Cordless Straight Grinder







Capacity

Spare Parts

Motor

No-load Speed	: 2 - 22.000 rpm
Weight	. 1 8 kg

1 617 000 6B0

GAS 18 V-LI (Bare Unit Only) **Cordless Vacuum Cleaner**





Capacity

Dust Capacity	: 700 ml
Vacuum Max.	: 4 kPa
Airflow Max.	: 19.3 l /sec
Weight	: 1.6 / 1.4 kg

Spare Parts

Floor Nozzle	1 619 PA5 202
Suction Tube	1 619 PA5 205
Filter	1 619 PA5 188
Dust Chamber	1 619 PA5 201

*GHO 18 V-LI **Cordless Planer**







Capacity	
No-load Speed	: 14,000 rpm
Cutting Depth	: 0 - 1,6 mm
Rebating Depth	: 0 - 8 mm
Planing Width, Max.	: 82 mm
Battery Voltage	: 18 V / 3.0 Ah
Weight	: 2.6 kg

opare rares	
Belt	2 604 736 001

-	
Motor	1 617 000 6B0
Electronic Module	1 607 233 340
0 11 1	2 007 202 071

Floor Nozzle	1 619 PA5 202
Suction Tube	1 619 PA5 205
Filter	1 619 PA5 188
Dust Chamber	1 619 PA5 201

Spare Parts

Belt	2 604 736 001
Motor	2 606 625 910

GBL 18 V-120 (Bare Unit Only) **Blower**







Capacity

No-load Speed	: 17,000 rpm
Air Speed, Max	: 75 m/s
Air Volume	: 2.0 m³/min
Runtime	: Speed I : 9 min / Ah
	: Speed II: 5 min / Ah

Weight without Cable: 1.1 kg

Air Speed, Max	: 75 m/s
Air Volume	: 2.0 m³/min
Runtime	: Speed I : 9 min / Ah
	: Speed II: 5 min / Ah

Spare Parts

GBH 180 LI Set

Nozzle 1 619 PA9 087

Cordless Rotary Hammer

GBH 18 V-EC Cordless Rotary Hammer

Electronic Module 1 607 233 340



Capacity

In Concrete	: 4 - 18 mm
In Steel / Wood	: 13 / 20 mm
Rated Speed	: 0 - 1,400 rpm
Impact Rate	: 0 - 4,550 bpm
Battery Voltage	: 18 V / 3.0 Ah
Weight	: 2.6 kg

Spare Parts

1 617 000 6D3
1 607 233 376
1 618 700 083
1 610 210 244

GBH 18 V-26 (Bare Unit Only) **Cordless Rotary Hammer**



Capacity

In Concrete	: 4 - 26 mm
In Steel / Wood	: 13 mm / 30 mm
Rated Speed	: 0 - 890 rpm
Impact Rate	: 0 - 4,350 bpm
Impact Energy	: 2,6 J
Max. Drilling Ø Concrete	: 26 mm
Weight	: 3.6 kg**

GBH 18 V-26 + GDE 18 V-16 Cordless Rotary Hammer + Dust Extractor



Capacity

In Concrete	: 4 - 26 mm
In Steel / Wood	: 13 mm / 30 mm
Rated Speed	: 0 - 890 rpm
Impact Rate	: 0 - 4,350 bpm
Impact Energy	: 2,6 J
Max. Drilling Ø Concrete	e: 26 mm
Battery Voltage	: 18 V / 6.0 Ah
Weight	: 3.6 kg**

*GSR 36 VE-2-LI Cordless Drill Driver





Capacity	
Drilling Capacity	: 20 mm
No-load Speed	: 0 - 1,800 rpm
Impact Rate	: 0 - 4,550 bpm
Impact Energy	: 1,7 J
Mode	: 3
Battery Voltage	: 18 V / 3.0 Ah
Weight	: 2.6 kg

36 V Li-lon



Capacity

Max. Drilling Dia.In Wood:	: 102 mm
In Steel:	: 16 mm
Torque, Max (Hard/Soft):	: 100 Nm
No-load Speed :	: 0 - 420 / 1,800 rpm
Max. Screw Diameter :	: 12 mm
Battery Voltage :	: 36 V / 4.0 Ah
Weight :	: 3.3 kg

Spare Parts

Electronics Module 160	07 233 511
Chuck 2 60	09 111 104

*GSA 36 V-LI **Cordless Sabre Saw**

HEAVY



Capacity

Stroke Length	: 28 mm
No-load Stroke Rate	: 2,400 / 3,000 spn
Battery Voltage	: 36 V / 4.0 Ah
Weight	: 4.2 kg

GBH 36 V-LI Plus Cordless Rotary Hammer





Capacity

In Concrete	: 4 - 28 mm
In Steel / Wood	: 13 / 30 mm
No-load Speed	: 0 - 940 rpm
Impact Rate	: 0 - 4,200 bpm
Battery Voltage	: 36 V / 4.0 Ah
Weight	. 4 5 kg

Spare Parts

Motor	1	607	022	662	
Electronics Module	1	607	233	512	
Tool Holder Fixture	1	617	000	6CB	

2 610 920 684 Tool Holder Supporting Foot 2 610 935 005

GBH 36 V-EC Compact Cordless Rotary Hammer







In Concrete	: 4 - 18 mm
In Steel	: 13 mm
In Wood	: 30 mm
Rated Speed	: 0 - 1,500 rpm
Impact Rate	: 0 - 4,850 bpm
Battery Voltage	: 36 V / 2.0 Ah
Weight	: 2.9 kg

Spare Parts

Protection Sleeve 1 617 000 6D3 Electronics Module 1 607 233 316 1 618 700 083 Hammer Piston 1 610 210 244



10.8 V, 1.5 Ah

10.8 V, 2.0 Ah

12 V, 2.5 Ah





2.0 Ah







10.8 V / 12 V / 14.4 V / 18 V Starter Kit



36 V Battery Pack

Charger

12 V, 2.0 Ah











12 V 2.0 Ah (2 Batteries) + GAL 1230 CV (1 Charger)



Charger (AL 1860 CV) + 2 Battery Packs (18 V, 2.0 Ah)

Charger (AL 1860 CV) + 2 Battery Packs (18 V, 4.0 Ah)



14.4 V 2.0 Ah (2 Batteries) + GAL 1860 CV (1 Charger)



Charger (AL 1860 CV) + 2 Battery Packs (18 V, 6.0 Ah)



2.0 Ah



GAL 1860 CV (For 10.8 V to 18 V)

GAL 1830 W

+ Frame (UK)



L-BOXX 102

L-BOXX 238

L-BOXX

GAL 3680 CV (For 14.4 V to 36 V)

L-BOXX 136

L-BOXX 306



GBM 10 RE HEAVY

Capacity



GBM 13 RE

GBA 18 V 1 X 4.0 Ah MW

Charger (AL 1860 CV) + 2 Battery Packs (18 V, 4.0 Ah)





: 450 W Power Input In Steel : 10 mm : 10 mm In Aluminium In Wood : 25 mm : 0 - 2,600 rpm No-load Speed Weight : 1.3 kg

Spare Parts Carbon Brush 2 610 391 290 2 607 200 623 Switch Chuck 2 608 571 078

Capacity Power Input In Steel : 600 W : 13 mm In Aluminium : 13 mm In Wood : 30 mm : 0 - 2,600 rpm No-load Speed : 1.65 kg Weight

Spare Parts		
Carbon Brush	2 610 391 290	
Switch	2 607 200 623	
Chuck	2 608 572 253	

*GBM 13-2







Capacity Power Input In Steel : 550 W : 13 / 8 mm : 32 / 20 mm In Wood No-load Speed Hi : 1,900 rpm : 1,000 rpm Weight : 1.9 kg

Spare Parts

Carbon Brush 1 607 031 222

GBM 13 HRE "High Torque"





: 550 W

: 13 mm

: 20 mm

: 40 mm

: 40 Nm

: 2.1 kg

: 0 - 550 rpm

*GBM 16-2 RE





Capacity

Power Input	: 1,050 W
In Steel	: 16 / 8 mm
In Wood	: 20 / 13 mm
No-load Speed Hi	: 0 - 1,200 rpm
Lo	: 0 - 520 rpm
Weight	: 3.7 kg

Spare Parts

Carbon Brush 3 607 014 012 1 607 200 075 Switch

*GBM 23-2 E





Capacity

Cupucity			
Power Input		: 1,150 W	
In Steel		: 23 /13 mm	
In Wood		: 50 / 35 mm	
No-load Spe	ed Hi	: 0 - 640 rpm	
	Lo	: 0 - 280 rpm	
Weight		: 4.6 kg	

Spare Parts

Carbon Brush 3 607 014 012 Switch 1 607 200 075

*GBM 32-4



Capacity

Power Input	: 1,500 W
In Steel	: 32 mm
In Aluminium	: 50 / 70 mm
4 Speed	: 210 / 330 / 470 / 740 rpm

Weight : 7.3 kg

GBM 350

Capacity

Power Input In Steel

In Aluminium

No-load Speed

Spare Parts

In Wood

Torque

Weight

Switch

Chuck



Carbon Brush 1 607 031 222

2 607 200 920

2 608 572 253

Capacit	y
---------	---

Power Input	: 350 W
In Steel	: 10 mm
In Aluminium	: 13 mm
In Wood	: 20 mm
No-load Speed	: 0 - 2,800 rpm
Weight	: 1.2 kg

Spare Parts

Carbon Brush	1 619 P20 086
Switch	2 607 200 623
Chuck	2 608 571 078

Impact Drill

GSB 10 RE (Also Available in 110V)



Capacity

Power Input	: 500 W
In Masonry	: 10 mm
In Steel	: 8 mm
In Wood	: 20 mm
No-load Speed	: 0 - 2,600 rpm
Weight	: 1.5 kg

Spare Parts

Carbon Brush	2 610 391 290
Switch	2 607 200 623
Armature	2 609 120 232
Coil	2 604 220 718
Chuck	2 608 571 078

GSB 13 RE





Capacity

Power Input	: 650 W
In Concrete	: 13 mm
In Steel	: 10 mm
In Wood (hard)	: 20 mm
No-load Speed	: 0 - 3,150 rpm
Impact Rate	: 0 - 47,000 bpm
Weight	: 1.6 kg

Spare Parts

Multi-Cutter

GOP 250 CE

HEAV

Carbon Bru	sh 2 610 391 290
Switch	2 607 200 623
Chuck	2 608 572 253

GSB 16 RE (Also Available in 110V)





Canacity

Capacity	
Power Input	: 750 W
In Concrete	: 16 mm
In Steel	: 12 mm
In Wood (hard)	: 25 mm
No-load Speed	: 0 - 3,250 rpm
Impact Rate	: 0 - 48,500 bpm
Weight	: 1.8 kg

Spare Parts

Carbon Brush	2 610 391 290
Switch	1 607 200 270
Chuck	2 608 572 253

GSB 20-2 RE

HEAV



Capacity

Power Input	: 800W
In Concrete	: 20 mm
In Steel	: 13 mm
In Wood (hard)	: 40 mm
No-load Speed	: 0 - 1,000 / 3,000 rpm
Impact Rate	: 0 - 16,000 / 48,000bpr
Weight	: 2.6 kg

Spare Parts

Carbon Brush	1 617 000 525
Switch	1 607 200 270
Chuck	2 608 572 253

*GSB 21-2 RCT

HEAV



Capacity

Spare Parts

Switch

- apacity	
Power Input	: 1,300 W
In Concrete	: 22 / 13 mm
In Steel	: 16 / 10 mm
In Wood (hard)	: 40 / 25 mm
No-load Speed	: 0 - 900 / 3,000 rpm
Max. Torque	: 43 - 20.5 Nm
Weight	: 2.8 kg

Carbon Brush 1 617 000 525



Power Input	: 1,300 W
n Concrete	: 22 / 13 mm
n Steel	: 16 / 10 mm
n Wood (hard)	: 40 / 25 mm
No-load Speed	: 0 - 900 / 3,000 rpm
Max. Torque	: 43 - 20.5 Nm
Veight	: 2.8 kg

2 607 200 679

Capacity

Power Input	: 250W
No-load speed	: 8,000 - 20,000 rpm
Oscillation angle on	
Left / Right	: 1.4°
Weight	: 1.3 kg

Carbon Brush	1 619 P02 870
Screw	2 609 110 797
Armature	2 609 199 334

Multi-Cutter

GOP 30-28







Capacity

Rotary Hammer

GBH 2-20 RE



Capacity

Capacity	
Power Input	: 600W
In Concrete	: 20 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0-1,000 rpm
Impact Rate	: 0-4,400 bpm
Weight	· 1 4 kg

Spare Parts

Carbon Brush	1 617 014 146
Switch	1 617 200 542
Armature	1 619 P09 818
Coil	1 619 P08 313

GBH 2-23 RE (Also Available in 110V)



Capacity

Power Input	: 650 W
In Concrete	: 23 mm
In Steel	: 13 mm
In Wood	: 30 mm
No-load Speed	: 0 - 1,000 rpm
Impact Rate	: 0 - 4,400 bpm
Weight	· 2 3 kg

Spare Parts

Carbon Brush	1 617 000 525
Switch	1 617 200 532
Armature	1 617 000 561
Cail	2 604 220 602

GBH 2-23 REA



ELECTRONIC

Capacity	
Power Input	: 710 W
In Concrete	: 4 - 23 mm
In Steel	: Up to 13 mm
In Wood	: Up to 30 mm
No-load Speed	: 0 - 1,000 rpm
Impact Rate	: 0 - 4,400 bpm
Weight	.29/36kg

Spare Parts

Carbon Brush	1 617 000 525
Switch	1 617 200 532
Filter	1 619 P04 479
Duct Can	1 610 DOG 107

GBH 2-24 RE / DRE





Capacity

Power Input	: 790 W
In Steel	: 13 mm
In Wood	: 30 mm
Impact Energy	: 2.7 J
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 4,200 bpm
Weight	: 2.8 kg

Spare Parts

Carbon Brush 1 617 000 525 Switch 1 607 200 32D Armature 1 619 P13 626

GBH 2-26 RE (Also Available in 110V)



Capacity

Oupacity	
Power Input	: 800 W
In Concrete	: 4 - 26 mm
In Steel	: Up to 13 mm
In Wood	: Up to 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,400 bpm
Weight	: 2.7 kg

Spare Parts

Carbon Brush 1 617 000 515 Switch 1 617 200 532 Armature 1 614 P10 005 Coil 1 614 270 127

GBH 2-26 DRE



Capacity

Power Input	: 800 W
In Concrete	: 4 - 26 mm
In Steel	: Up to 13 mm
In Wood	: Up to 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,400 bpm
Weight	: 2.7 kg

Spare Parts

Carbon Brush 1 617 000 525 Switch 1 617 200 532

GBH 2-26 DFR



Capacity

Power Input	: 800 W
In Concrete	: 4 - 26 mm
In Steel	: Up to 13 mm
In Wood	: Up to 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Weight	: 2.9 kg

Spare Parts

Carbon Brush 1 617 000 525 Switch 1 617 200 532 Chuck 2 608 572 213

GBH 2-28 DFV









Capacity

Power Input	: 820 W
Impact Energy	: 0 - 3.2 J
In Concrete	: 4-28 mm
In Steel	: 13 mm
In Masonry	: 68 mm
No-load Speed	: 0 - 1,300 rpm
Impact Rate	: 0 - 5,100 bpm
Weight Spare Parts	: 2.9 kg

Carbon Brush 1 617 000 525 Switch 1 617 200 532 Chuck 2 608 572 213

GBH 3-28 DFR



Canacity

Capacity	
Power Input	: 800 W
In Concrete	: 28 mm
In Steel	: Up to 13 mm
In Wood	: Up to 30 mm
No-load Speed	: 0 - 900 rpm
Impact Rate	: 0 - 4,000 bpm
Weight	: 3.6 kg

Spare Parts

Carbon Brush	1 617 000 525
Switch	1 617 200 127
Chuck	2 608 572 213

*GBH 4-32 DFR (Also Available in 110V)



Capacity

Power Input	: 900 W
In Concrete	: 32 mm
In Steel	: Up to 13 mm
In Wood	: Up to 32 mm
No-load Speed	: 0 - 760 rpm
Impact Rate	: 0 - 3,600 bpm
Weight	: 4.7 kg

Spare Parts

Carbon Brush	1 614 321 079
Switch	1 617 200 127
Chuck	2 608 572 213

Magnetic Drill Stand

*GMB 32



Capacity

Power Input	: 95 W
Clamping Flange Diameter	: 65 mm
Magnet Retention Force	: 25 kN
Working Length, Z-axis	: 223 mm
Twist Drill Bit Diameter	: 32 mm
Core Cutter Dia.	: 12 - 60 mm
Weight	: 26 kg

Spare Parts

Switch 3 609 201 527

Rotary Hammer with SDS-Max

GBH 5-40 D (Also Available in 110V)







Capacity

Power Input	: 1,100 W
Rate Speed	: 170 - 340 rpm
Impact Energy	: 8.5 J
Chisel Positions	: 12
Impact Rate	: 1,500 - 2,900 bpm
Weight	: 6.8 kg

Spare Parts

*GDE 16

Carbon Brush 1 617 014 138 Hammer Piston 1 619 P10 765 1 619 P10 769 Armature Coil 1 619 P08 323

*GBH 8-45 D (Also Available in 110V)





Capacity	
Power Input	: 1,500 W
Impact Energy	: 12.5 J
No-load Speed	: 0 - 305 rpm
Impact Rate	: 1,380 - 2,720 bpm
Weight	. 8 2 ka

Spare Parts

Carbon Brush	1 617 000 A50
Armature	1 614 010 267
Coil	1 614 220 124

Dust Extractor

*GDE 68



Capacity

Drilling Diameter	: max. 68 mm	
Weight incl. Battery	: 0.325 kg	
Suitable for all drilling tools, e.g.		
GBH 4-32 DFR, GBH 5-40 DCE,		
CRH 9-45 DV		

Capacity

*GDE 162

Drilling Diameter : max. 162 mm Weight incl. Battery : 0.5 kg Suitable for all drilling tools, e.g. GBH 4-32 DFR, GBH 5-40 DCE, **GBH 8-45 DV**

Spare Parts

Sealing Profile 1 600 A00 1MJ 1 600 A00 1NT Brush Bar

*GDE Max

Carbon Brush	1 617 000 A50
Armature	1 614 010 267
Coil	1 614 220 124

1 600 A00 1MK Brush Bar

Spare Parts



Demolition Hammer

GSH 5 (SDS MAX)

Sealing Profile 1 600 A00 1MJ

GSH 5X Plus (Also Available in 110V)





Capacity

Drilling Diameter : max. 16 mm Maximum drilling depth : 120 mm Weight incl. Battery : 0.520 kg Suitable for GSB 16 RE, GSB 19-2 RE, GSB 21-2 RE, GSB 21-2 RCT

: 0.750 kg		
Suitable for GSH 5 CE, GSH 7 VC,		
GSH 11 VC; GBH 5-40 DCE, GBH 7-46 DE		
E		



Capacity	
Power Input	: 1,100 W
Impact rate	: 2,850 bpm
Impact Energy	: 7.5 J
No-load Speed	: 27,000 rpm
Mainle	. E. G. k.a.

Capacity

Power Input	: 1,025 W
Impact rate	: 2,750 bpm
Impact Energy	: 6.8 J
Tool holder	: Hex (17 mm)
Vo l tage	: 240 V
Frequency	: 50 / 60 Hz
Weight	· 5 5 kg

Spare Parts

Spare Parts Socket Pipe 1 600 A00 1PZ Elbow 1 600 A00 1JN

1 600 A00 1W1 V-Block Index Turning Toolholder 1 600 A00 1R9 1 600 A00 1LX Brush Bar

Spare Parts

GSH 11 E

Carbon Brush	1 617 014 138
Hammer Piston	1 619 P07 775
Armature	1 619 P10 090
Coil	1 619 P05 386

Spare Parts

GSH 11 VC

Carbon Brush	1 617 014 138
Hammer Piston	1 619 P09 703
Switch	1 619 P09 019
Armature	1 619 P09 697
Coil	1 619 P08 302

GSH 5 CE (*Also Available in 110V)





GSH 9 VC



Capacity

Power Input

Impact rate

Impact Force

Weight

: 1,500 W

: 6 - 25 J

: 10.1 kg

: 900 - 1,890 bpm



□ | ♦ | ⊜ | constant









Capacity

Power Input	: 1,150 W
Impact rate	: 1,300 - 2,900 bpn
Impact Force	: 2 - 13 J
Weight	· 6.2 kg

Spare Parts

Carbon Brush	1 617 014 138
Armature	1 614 011 098
Stopping Device	1 612 300 036
Indexing Disk	1 610 290 076
Hammer Piston	1 617 000 A00







Carbon Brush 1 617 000 A50

1 614 010 267 1 614 220 124





Capacity

Power Input	: 1,500 W
Impact Force	: 13 J
Vibration Value	: 9.5 m/s²
Weight	: 8.5 kg

Spare Parts

Armature

: 1,500 W
: 13 J
: 9.5 m/s ²
: 8.5 kg

Spare Parts

opare i ai to	
Carbon Brush	1 617 014 126
Switch	1 617 200 048
Armature	1 614 011 072
Coil	1 607 000 C3V



Capacity

Power Input	: 1,700 W
Impact Rate	: 900-1,700 bpm
Impact Force	: 23 J
Vibration Values Chiselling	: 8 m/s²
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 11.4 kg

oparo i arto	
Carbon Brush	1 617 000 A50
Armature	1 614 011 120
Coil	1 604 220 52F

Demolition Hammer



W Vibratio

Capacity

Power Input	: 1,750 W
Impact rate	: 1,300 bpm
Impact Force	: 45 J
Weight	: 16.5 kg

Spare Parts

Carbon Brush	1 617 014 126
Hammer Piston	1 607 000 C3M
Armature	1 614 011 117
Switch	1 607 200 244
Coil	1 614 270 187

Straight Grinder GGS 3000 L GSH 27 VC





GGS 5000 L



Capacity

Power Input	: 300 W
Collet	: 6 mm
Diameter (L x H x W)	: 360 x 80 x 80 mm
No-load Speed	: 28,000 rpm
Voltage	: 240 V
Frequency	: 50 / 60 Hz
Weight	. 1 8 kg

Spare Parts

Carbon Brush	1 607 031 223
Armature	1 619 P08 203
Switch	1 607 200 146
Coil	1 610 DOQ 935

Capacity

Power Input	: 500 W
No-load Speed	: 33,000 rpm
Max. Collect Capacity	: 8 mm
Diameter (L x H x W)	: 360 x 80 x 80 mm
Voltage	: 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

Spare Parts

Carbon Brush	1 607 031 223
Armature	1 619 P08 212
Switch	1 607 014 146
Coil	1 619 P09 888

GGS 28 C



*GGS 28 LC (Also Available in 110V)

1 614 011 139

1 617 200 124

Carbon Brush 1 617 000 425

: 2,000 W

: 69 J

: 29.5 kg

: 1,000 bpm



W Vibra

Capacity

Power Input Impact rate

Impact Force

Spare Parts

Armature

Switch

Weight

*GGS 6 S



Angle Grinder

GWS 060







Capacity

Power Input	: 650 W
Max.Collet Diameter	:8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	: 1.4 kg

Spare Parts

Carbon Brush	1 607 014 176
Armature	3 607 030 476
Switch	1 607 200 199
Coil	3 607 030 475





Capacity

Power Input	: 650 W
Max.Collet Diameter	:8 mm
No-load Speed	: 28,000 rpm
Voltage	: 230 / 240 V
Frequency	: 50 / 60 Hz
Weight	· 1 6 kg

Spare Parts

Carbon Brush	1 607 014 176
Armature	3 607 030 476
Switch	1 607 200 199
Coil	3 607 030 475



Capacity	
Power Input	: 1,200 W
Grinding Points (Diameter)	: Max. 125 m
No-load Speed	: 6,800 rpm
Weight	· 3.9 kg



Capacity	
Power Input	: 670 W
No-load Speed	: 12,000 rpm
Spindle	: M10 / M14
Disc Dia.	: 100 / 115 mm
Weight	: 1.6 kg

Spare Parts

Carbon Brush	3 607 014 012
Armature	1 604 010 474
Curitob	1 607 200 064

Spare Parts

Carbon Brush	1 607 031 223
Armature	1 619 P01 844
Switch	1 607 200 32E
Coil	1 610 D12 216

GWS 6-100 (Available in 110V only)











Power Input : 670 W Grinding / Cutting Disc Diameter : 100 mm Wire Cup Brush Diameter : 70 mm No-load Speed : 11,000 rpm

Spare Parts

Weight

Carbon Brush	1 607 031 223
Armature	1 604 010 626
Switch	1 607 200 179
Coil	1 604 220 328

GWS 750-100







Capacity

Power Input	: 750 W
No-load Speed	: 11,000 rpm
Disc Diameter	: 100 mm
Grip Size	: 59/54.5 mm
Perimeter	: 187 mm
Weight	: 1.8 kg

Spare Parts	
Carbon Brush	1 607 031 223
Armature	1 619 P08 234
Coil	1 619 P08 334

GWS 8-100 C







Power Input	: 850 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Wire Cup Brush Diameter	: 70 mm
No-load Speed	: 11,000 rpm
Weight	: 1.8 kg

Spare Parts

opare i arts	
Carbon Brush	1 607 031 223
Armature	1 604 010 667
Switch	1 607 200 179
Governor	1 607 233 139

GWS 8-100 CE











Power Input	: 850 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Wire Cup Brush Dia.	: 70 mm
No-load Speed	: 2,800 - 11,000 rpm
Weight	: 1.8 kg

Spare Parts

Carbon Brush	1 607 031 223
Armature	1 604 010 667
Switch	1 607 200 179
Governor	1 607 233 137

: 1.8 kg

GWS 900-100







Capacity

Power Input	: 900 W
Grinding / Cutting	
Disc Diameter	: 100 mm
No-load Speed	: 10,000 rpm
Grinding Spindle Thread	: M 10
Weight	· 1 8 kg

Spare Parts

GWS 8-100 Z (Also Available in 110V)







Capacity

Power Input	: 800 W
Grinding / Cutting	
Disc Diameter	: 100 mm
Wire Cup Brush Diameter	: 70 mm
No-load Speed	: 11,000 rpm
Weight	: 1.9 kg

Spare Parts

Carbon Brush	1 607 014 176
Switch	1 619 P09 841
Armature	1 604 010 635 (110v)
Coil	1604 220 306 (110v)

GWS 12-125 CI (Also Available in 110V)









Capacity

Power Input	: 1,200 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Wire Cup Brush Diameter	: 75 mm
Weight	· 2 3 kg

Spare Parts

Carbon Brush	1 607 000 V37
Armature	1 607 000 V33
Bearing Flange	1 607 000 448
Governor	1 607 233 472

GWS 13-125 CI







Capacity

Power Input	: 1,300 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Wire Cup Brush Diameter	: 75 mm
Weight	. 23 ka

Spare Parts

Carbon Brush 1 607 000 V37 Bearing Flange 1 607 000 448 Gear Sets 1 607 000 V44

Carbon Brush 1 607 031 223

*GWS 15-125 INOX













Capacity

Power Input	: 1,500 W
Grinding / Cutting	
Disc Diameter	: 125 mm
Wire Cup Brush Dia.	: 70 mm
No-load Speed	: 2,000 - 8,000 rpm
Weight	: 2.4 kg

Spare Parts

Carbon Brush	1	607	014	176	
Armature	1	604	010	A23	
Switch	1	607	200	200	

*GWS 15-125 CI













Capacity

Power Input	: 1,500 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Wire Cup Brush Diameter	: 75 mm
Weight	: 2.4 kg

Spare Parts

Carbon Brush	1 607 000 V37
Armature	1 607 000 V35
Coil	1 604 220 532
Switch	1 607 200 256

GWS 17-125 CI













Capacity

Power Input	: 1,700 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 125 mm
Wire Cup Brush Diameter	: 75 mm
Weight	: 2.4 kg

Spare Parts

Carbon Brush	1 607 000 V37
Bearing Flange	1 607 000 448
Gear Sets	1 600 A00 22W

GWS 17-150 CI













Capacity	
Power Input	: 1,700 W
No-load Speed	: 11,500 rpm
Grinding Spindle Thread	: M14
Disc Diameter	: 150 mm
Wire Cup Brush Diameter	: 75 mm
Weight	: 2.4 kg

Spare Parts

Carbon Brush	1 607 000 V37
Bearing Flange	1 607 000 449
Goar Sate	1 607 000 A/P

*GWS 20-180 (Also Available in 110V)





Capacity

Power Input	: 2,000 W
Grinding / Cutting	
Disc Diameter	: 180 mm
Wire Cup Brush Diameter	: 100 mm
No-load Speed	: 8,500 rpm
Weight	: 4.2 kg

Spare Parts

Carbon Brush	1 607 014 176
Armature	1 604 011 252
Coil	1 604 220 380
Switch	1 607 000 967

GWS 20-230

HEAVY





Capacity

Power Input	: 2,000 W
Grinding / Cutting	
Disc Diameter	: 230 mm
Wire Cup Brush Diameter	: 100 mm
No-load Speed	: 6,500 rpm
Weight	· 4 2 kg

Spare Parts

Carbon Brush	1 607 014 176
Armature	1 604 011 252
Coil	1 604 220 380
Switch	1 607 000 967

Impact Wrench

*GDS 18 E (Also Available in 110V)





Power Input	: 500 W
Bolts KW	: M6 - M18
Torque	: 70 - 250 Nm
No-load Speed	: 500 - 1,300 rpm
Weight	: 3.3 kg

Spare Parts

Carbon Brush	1 619 PA2 438
Tool Holding Fixture	1 619 PA2 453
Armature	1 619 PA2 436
Coil	1 619 PA2 435

*GDS 30 HEAV





Capacity

Power Input	: 920 W
Torque	: 500 - 1,000 Nm
Toolholder	: 1" External square
No-load Speed	: 860 rpm
Weight	: 7.3 kg

Spare Parts

Carbon Brush 3 607 014 012

Stirrer / Mixer Drill

GRW 12 E







Capacity

Power Input	: 1,200 W
Rated Torque	: 12,0 Nm
Connector Type	: M14 Inside Thread
Max. Paddle Ø	: 140 mm
Incl. Paddle Ø	: 140 mm
No-load Speed	: 0 - 1,000 rpm
Weight	: 5.3 kg

Spare Parts

Carbon Brush	1 607 014 17A
Armature	1 604 010 B1U
Mixer Attachment	3 609 201 038
Coil	1 604 220 235

Shear

*GSC 2.8





Canacity

- apacity	
Power Input	: 500 W
In Steel	: 2.8 mm
In Aluminium	: 3.5 mm
No-load Stroke Rate	: 2,400 rpm
Weight	: 2.7 kg

Bench Grinder

GBG 35-15





Capacity

Power Input	: 350 W
No-load Speed	: 3,000 rpm
Disc Diameter	: 150 mm
Weight	· 10 kg

GBG 60-20





Capacity	
Power Input	: 600 W
No-load Speed	: 3,000 rpm
Disc Diameter	: 200 mm
Weight	. 17 kg

Spare Parts

Upper Blade 2 608 635 065

Nibbler

GNA 2.0



Capacity

Power Input	: 500 W
Mild Steel	: 2.0 mm
Stainless Steel	: 1.0 mm
No-load Speed	: 2,400 Stroke/min
Weight	. 2 O kg

Spare Parts

Carbon Brush	1 607 031 228
Die Holder	2 608 639 900
Straight & Curve	
Cutting Punch	2 608 639 013

Marble Cutter

GDM 121





Capacity Power Input

	,
Cutting Depth (at 90°)	: 34 / 36 mm
Cutting Disc	: 110 / 115 mm
Cord Length (rubber)	: 2.1 m
No-load Speed	: 14,500 rpm
Weight	: 2.8 kg

: 1.250 W

Spare Parts

Carbon Brush	1 619 PA4 025
Armature	1 619 PA9 243
Switch	1 619 PA7 561
Coil	1 619 PA7 559

Diamond Wheel Cutter

GDM 13-34 (*Also Available in 110V)



Capacity

Power Input	: 1,300 W
Blade Diameter	: 110 mm
Max. Cutting Depth	: 34 mm
Base Plate	: 100 X 190 mm
No-load Speed	: 12,000 rpm
Weight	: 2.8 kg

Spare Parts

Carbon Brush	1 619 P06 304
Armature	1 619 P06 303
Screw	1 619 P00 278
Inner Flange	1 619 P07 057
Outer Flange	1 619 P06 295

Circular Saw

GKS 7000



Capacity	
Power Input	: 1,100 W
No-load Speed	: 5,200 rpm
Saw Blade Range	: 187 - 190 mm
Max. Cutting depth 90° / 45°	: 67 / 49 mm
A47 1 1 1	0.01

Spare Parts

Carbon Brush	1 619 P10 063
Armature	1 619 P10 062
Coil	1 619 P08 314
Switch	1 619 P09 971

Sabre Saw

GSA 1100 E (*Also Available in 110V)





Capacity Power Input : 1,100 W Cutting depth: In Wood : 230 mm In Metal : 20 mm No-load Stroke Rate : 0 - 2,700 spm

Spare Parts

Weight

Carbon Brush	2 610 956 917
Screw	1 619 P05 408
Blade Holder	1 619 PA4 168
Supporting Foot	2 610 956 898

GSA 1300 PCE













Power Input	: 1,100 W
Cutting depth: In Wood	: 230 mm
In Metal	: 20 mm
No-load Stroke Rate	: 0 - 2,900 spm
Weight	: 4.1 kg

Spare Parts

Carbon Brush	2 610 956 917
Blade Holder	2 610 010 029
Supporting Foot	2 610 010 015

Jigsaw

GST 65 (Also Available in 110V) / GST 65 E







Capacity

Power Input	: 400 W
In Wood	: 65 mm
In Steel	: 3 mm
No-load Stroke Rate	
(GST 65)	: 3,100 spm
(GST 65 E)	: 500 - 3,100 spm
Weight	: 1.7 kg

Spare Parts

Carbon Brush	2 604 321 919
Switch	2 607 200 637
Base Plate	2 601 016 012
Retaining Bracket	2 608 135 901

GST 80 PBE





Capacity

Power Input	: 580 W
In Wood	: 85 mm
In Steel	: 10 mm
No-load Stroke Rate	: 500 - 3,100 spm
Weight	· 2.4 kg

Spare Parts

Carbon Brush	1 607 031 228
Base Plate	2 601 016 903
Roller Level	2 601 321 902
Lifting Rod	2 600 780 177
Clamp Screw	2 603 400 000

: 3.6 kg

Jigsaw

GST 25 M (Also Available in 110V)







Power Input	: 670 W
In Wood	: 80 mm
In Aluminium	: 25 mm
In Steel	: 15 mm
No-load Stroke Rate	: 500 - 2,600 rpm
Weight	· 2 7 kg

HEAVY DUTY

Carbon Brush	1 607 031 228
Base Plate	1 619 P07 199
Roller Level	1 619 P07 318

wer Input	: 670 W
Wood	: 80 mm
Aluminium	: 25 mm
Steel	: 15 mm
o-load Stroke Rate	: 500 - 2,600 rpm
eight	. 2.7 kg

Spare Parts

Carbon Brush	1	607	031	228	
Base Plate	1	619	P07	199	
Roller Level	1	619	P07	318	

GCO 14-24 J (Soft Start)

Carbon Brush	1 607 031 228
Base P l ate	1 619 P07 199
Pollor Lovel	1 619 P07 318

GCM 10 S



Capacity

Power Input	: 2,400 W
Saw Blade Diameter	: 355 mm
Saw Blade Bore	: 25.4 mm
No-load Speed	: 3,800 rpm
Voltage	: 230 / 240 V
Weight	· 18 1 kg

Spare Parts

Carbon Brush	1 607 014 171
Armature	1 609 B03 639
Coil	1 609 B00 149

Mitre Saw Stand

*T1B



Capacity

Length of work bench	
without extension	: 1,220 mm
Length of work bench	
with extension	: 2,630 mm
Weight	: 17 / 22 kg

GCD 12 JL

Dry Cutter



Capacity

Power Input	:	2,000 W
Saw Blade Diameter	:	305 mm
Mitre Angles	:	0° - 45°
No-load Speed	:	1,500 rpm
Cutting Capacity (Square)	:	100 X 100 mm
(Round)	:	115 mm
Weight	:	20 kg

Spare Parts

Carbon Brush	1 607 014 171
Armature	1 609 B04 679
Coil	1 609 B00 115
Switch	1 609 B05 400

Slide Mitre Saw



Power Input	: 1,800 W
Blade Size	: 254 mm
Bore Size	: 30 mm
No-load Speed	: 4,700 rpm
Max. Mitre	: 52º L / 62º R
Cutting Capacity	: 87 X 305 mm
Weight	· 21 5 kg

Snaro Darte

Spare I arts	
Carbon Brush	1 609 203 L02
Armature	1 619 P03 776
Coil	1 609 203 156

Table Saw Stand

GTA 600 (0 601 B22 002)



Capacity

Table Height	: 602 mm
Max. Length Extension	
Unfolded	: 450 x 520 (D x L)
Max. Load Capacity	: 60 kg
Weight	: 6.3 kg

Cut off Machine

GCO 200



Capacity

Power Input	: 2000 W
No-load Speed	: 3,800 rpm
Disc Diameter	: 355 mm
Blade Bore Size	: 25.4 mm
Weight	: 17 kg

Spare Parts

Carbon Brush	1 607 014 171
Armature	1 609 B03 639
Coil	1 609 B00 135
Switch	1 609 B03 606

Table Saw

GTS 10 J





Capacity	
Power Input	: 1,800 W
Saw Blade Diameter	: 254 mm
Bevel Setting	: 47º L / 2º R
Cutting Capacity (Right)	: 460
(Left)	: 210
Weight	· 26 kg

Spare Parts

Carbon Brush	2 610 018 332
Coil	1 609 203 K86
Armature	1 619 P03 278
Switch	2 610 016 997

Mitre Saw

GCM 10 MX



Capacity	
Power Input	: 1,700 W
Blade Size	: 255 mm
Arbour Size	: 25.4 mm
No-load Speed	: 4,800 rpm
Max Mitre	: 45° L / 52° R
Max. Cutting Capacity	: 89 x 89 mm
Weight	· 13.5 kg

Spare Parts

Carbon Brush	1 619 PA7 057
Armature	1 619 PA7 056
Coil	1 619 PA6 835

GCO 2000 (Available in 110V Only)



Power Input	: 2,000 W
Blade Diameter	: 355 mm
Max. Cutting Capacities at 90°	: 120 mm
No-load Speed	: 3,500 rpm
Weight	: 15.8 kg

Spare Parts

Carbon Brush	1 607 014 171
Armature	1 609 B03 566
Coil	1 609 B00 129
Switch	1 619 P03 844

Compound Mitre Saw

GCM 10 M



Capacity

Power Input	: 2,000 W
Blade Size	: 254 mm
Bore Size	: 25.4 mm
No-load Speed	: 5,000 rpm
Max. Mitre	: 47° L / 47° R
Weight	· 13 8 kg

Spare Parts

Carbon Brush	1 607 014 171
Armature	1 609 B00 879
Coil	1 609 B00 119
Switch	1 609 B00 882

Foam Cutter

GSG 300



Capacity

Power Input	: 350 W
Cutting Capacity	: 300 mm
No-load Stroke Rate	: 3,200 spm
Weight	: 1.6 kg

Spare raits	
Carbon Brush	1 607 014 17J
Base Plate	2 608 000 908
Switch	2 607 200 286

Planer

GHO 10-82 (*Also Available in 110V)







Capacity

Power Input	: 710 W
Planing Width	: 82 mm
Planing Depth	: 0 - 3.0 mm
No -l oad Speed	: 16,500 rpm
Weight	: 2.5 kg

Spare Parts

Carbon Brush	1 607 031 222
Planing Knife	2 609 110 357
V-Belt	2 609 100 410

GHO 6500





Canacity

Power Input	: 650 W
No-load Speed	: 16,500 rpm
Adjustable Chip Thickness	ss : 0 - 2.6 mm
Adjustable Rebating Dep	th:0-2.6 mm
Diameter (L x H x W): 28	30 x 140 x 158 mm
Weight	· 2 8 kg

Spare Parts

Planing Knife	2 609 110 357
V-Belt	2 609 100 410

Orbital Sander

GSS 1400





Canacity

Power Input	: 180 W
No-load Speed	: 12,000 rpm
Orbital Rate	: 24,000 opm
Oscillating Circuit Dia.	: 1.6 mm
Weight	: 1.4 kg

Spare Parts

Carbon Brush	2 609 120 199
Felt	2 609 170 217
Plate	2 609 101 073
Clamp Handle	2 609 111 796
Switch	1 607 200 100

Capacity

GSS 230

Power Input	: 190 W
Orbit Rate	: 24,000 opm
Sanding Plate	: 92 x 182 mm
Weight	: 1.4 kg

Carbon Brush	2 609 120 199
elt	2 609 170 217
late	2 609 101 073
Clamp Handle	2 609 111 796
Switch	1 607 200 100

Spare Parts

Carbon Brush	2 609 120 199
Switch	2 607 200 632
Foam Panel	2 609 100 403

*GSS 280 AE





Capacity

Power Input	: 330 W
Oscillating Circuit	
Diameter	: 2.4 mm
Orbit Rate	: 11,000 - 22,000 opm
Sanding Plate	: 114 mm
No-load Speed	: 5,500 - 11,000 rpm
Weight	· 2 6 kg

Spare Parts

Sander Plate 2 608 000 168 2 607 200 260 Switch

GSS 280 AVE





Capacity

Power Input	: 350 W
Oscillating Circuit	
Diameter	: 2.4 mm
Orbit Rate	: 16,000 - 22,000 opm
Sanding Plate	: 114 mm
No-load Speed	: 8,000 - 11,000 rpm
Weight	: 2.75 kg

Spare Parts

Carbon Brush	1 607 014 117
Switch	2 607 200 688
Coil	2 604 220 750
Armature	2 604 011 955

Eccentric Sander

GEX 125-1 AE





Power Input	: 250 W
Oscillating Circuit	
Diameter	: 2.5 mm
Orbit Rate	: 15,000 - 24,000 opr
Sanding Plate	: 125 mm
No-load Speed	: 7,500 - 12,000 rpm
Weight	: 1.3 kg

Spare Parts

Carbon Brush	2 609 120 199
Switch	1 607 200 190
Dust Container	2 609 199 176
Bearing Flange	2 609 100 862
Backing Pad	2 609 100 900

Belt Sander

GBS 75 A





Capacity

Power Input	: 710 W
No-load Belt Speed	: 300 m/min
Sanding Surface	: 75 x 130 mm
Belt Size	: 75 x 533 mm
Weight	: 3.2 kg

Spare Parts

oparo i ai to		
Carbon Brush	1 607 031 222	
Belt	2 604 736 010	

Polisher

GPO 12 CE







Capacity

Power Input	: 1,250 W
Polishing Disc Diameter	: 180 mm
Thread of	
Doliching Spindle	. M11.4

Polishing Spindle	: M14
Tool Length	: 450 mm
No-load Speed	: 750 - 3,000 rpn
Weight	: 2.5 kg

Spare Parts

-		
Carbon Brush	1 607 014 176	
Speed Governor	1 607 233 256	
Switch	1 607 200 257	
	1 010 000 115	

Blower

GBL 800 E (Also Available in 110V)







Capacity

Power Input	: 800 W
No-load Speed	: 16,000 rpm
Air Volume	: 4.5 m³ /min
Weight	: 1.8 kg

Spare Parts

1 604 321 129
1 607 233 348
2 607 200 637
1 604 010 A58
1 604 220 439

Hot Air Gun

GHG 600-3





Capacity

Power Input	: 1,800 W
Temperature	: 50 / 400 / 600°C
Air Flow	: 250 / 350 / 500 I/mir
Weight	: 0.8 kg

GHG 630 DCE (Also Available in 110V)





Capacity

Power Input	: 2,000 W
Temperature	: 50 - 630°C
Air F l ow	: 150 / 300 / 500 I/min
Weight	: 0.9 kg

Spare Parts

DC Motor	1 609 202 H59
Connecting Block	1 609 203 HSS
Heating Element	1 609 203 J99

DC Motor	1 609 202 611
Connecting Block	1 609 203 L51
Heating Flement	1 609 203 T99

Mini Router / Trimmer

GMR 1





Capacity

Power Input	: 550 W
Collet	: 6 mm or 1/4"
No-load Speed	: 33,000 rpm
Weight	· 1 5 kg

Spare Parts

Carbon Brush 2 609 120 149 2 609 120 274 Switch Base Plate 2 610 008 124

GAS 11-21





Capacity	
Power Input	: 1,100 W
Container Volume	: 21 litre
Air Flow Max.	: 50 I/sec
Volume	: 150 mbar
Hose Diameter	: 35 mm
Weight	: 6.3 kg

Spare Parts

Spare raits				
Dust Bag (5 pcs)	2	605	411	150
Filter	1	609	203	A54
Support Frame	1	609	203	A55
Ring	1	609	203	A53
Switch	1	609	203	A33
Container	1	609	203	D28
Hose	2	607	002	149
Suction Pipe	1	609	203	B92
Suction Nozz l e	1	609	390	478
Wheel	1	609	203	A66

Wet & Dry Vacuum Cleaner Cordless Optical Scope

GIC 120









Capacity

Battery Voltage	: 6.0 V
Display size	: 2.7"
Display Resolution	: 320 x 240 px
Dia.of camera head	: 8.5 mm
Length of camera cable	: 120 cm
Weight	: 0.5 kg

Capacity

: 10.8 V
: 3.5"
: 320 x 240 px
: 8.5 mm
: 120 cm
: 0.6 kg

Laser Rangefinder

GLM 30

GLM 40

GLM 50

GLM 50 C













⋒² ⊗

Capacity

Laser Diode : 635 nm, <1mW Measuring Range : 0.15 - 30 m Measuring Accuracy : ± 2 mm Measuring Units : m/cm, ft/inches Batteries : 2 x 1.5V LR03 (AAA) Voltage : 6 VDC Weight : 0.1 kg



Capacity

Working Range	: 0.15 - 40 m
Laser Class	: 2
Measurement Accuracy	v: ± 2 mm
Batteries	: 2 x 1.5 V LR03(AAA
Weight	. 0 09 kg



Capacity

GLM 100 C

Laser Diode : 635 nm, <1mW Measuring Range : 0.05 **-** 50 m Measuring Accuracy : ± 1.5 mm Measuring Units : m/cm, ft/inches Batteries : 2 x 1.5V LR03 (AAA) Voltage : 6 VDC Weight : 0.14 kg



🚵 🔕 👔 Bluetooth

Capacity

Laser Diode : 635 nm, <1mW Measuring Range : 0.05 **-** 50 m Measuring Accuracy : ± 1.5 mm Measuring Units : m, ft, in Batteries : 2 x 1.5 V LR03(AAA) : 30 Memory Capacity Weight : 0.1 kg

GLM 500

NEW!



GLM 80 + R60







GLM 250 VF





Capacity

Laser Diode	: 635 nm, <1mW
Measuring Range	: 0.05 - 500 m
Measuring Accuracy	: ± 1.5 mm
Tilt Sensor Range	: 0° - 360°
Batteries	: 2 x 1.5 V LR03 (AAA)
Memory Capacity	: 20
Weight	: 0.10 kg





Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range	: 0.05 - 80 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m/cm, ft/inches
Batteries	: Lithium-lon
Voltage	: 5 VDC
Weight	: 0.14 kg







C

Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range	: 0.05 - 100 m
Measuring Accuracy	: ± 1.5 mm
Measuring Units	: m/cm/mm
Batteries	: Lithium-lon
Memory Capacity (Valu	ues): 50 + 1
Weight	: 0.14 kg



Capacity	
Laser Diode	: 635 nm, <1mW
Measuring Range	: 0.05 - 250 m
Measuring Accuracy	: ± 1 mm
Measuring Units	: m/cm, ft/inches
Batteries	: 4 x 1.5V LR03 (AAA)
Voltage	: 6 VDC
Weight	: 0.24 kg

GMS 100 M

GMS 120

GIS 1000 C







Capacity



№² **№**



LASER	
Capacity	
Laser Diode	: 635 nm, <1mW
Working Range*	: 0.1 - 5 m
Measuring Range*	: - 40°C to + 1000°C
Measuring accuracy	: ± 1.0°C (0°C - 100°C
Batteries	: 4 x 1.5 V LR6(AA) /
	10.8 V
Relative Humidity	: 0 - 100 %
Accuracy	: ± 2 %
Storage Medium	: 200 images
Weight	: 0.6 kg

Capacity

Detection Mode : Universal, Concrete, Drywall Detection Object : Ferrous metals, non-ferrous metals, live cables, wooden objects and *water-filled plastic pipes Max. Detection Depth: 120 mm Accuracy : ± 10 mm Power Supply : 4 x 1.5 V LR6(AA) Weight, approx : 0.5 kg

Capacity

Max. Measuring	
Depth Ferrous Metals	: 100 mm
Non-Ferrous Metals	: 80 mm
Accuracy	: ± 5 mm
Copper Conductors	: 50 mm
Voltage	: 9 VDC
Weight	: 0.26 kg

Max. Measuring Depth	: 120 mm
Live cables	: 50 mm
Wooden beams	: 38 mm
Metal (magnetic)	: 120 mm
Metal (non-magnetic)	: 80 mm
Batteries	: 1 x 9 V 6LR61
Weight	: 0.27 kg

Line Laser

GLL 1 P



GCL 2-15 G











Weight



Capacity	
Laser Diode	: 635 nm, 1mW
Working Range	: up to 16 ft
Leveling Accuracy	: ± 3/64 in @ 3.3 ft
Batteries	: 2 x 1.5V (AAA)
Mount Threading	: 1/4 - 20

: 0.25 kg





Capacity	
Laser Diode	

Working Range	: 20 m
Working Range With	
Receiver	: 50 m
Leveling Accuracy	: ± 0.3 mm / m
Batteries	: 3 x 1.5 V LR6(AA)
Voltage	: 4.5 VDC
Weight	: 0.45 kg

: 635 nm, <1mW



Capacity

Working Range	: 15 m
Self-leveling range	: ± 4°
Leveling Accuracy	: ± 0.3 mm
Tripod Mount	: 1/4", 5/8"
Batteries	: 3 x 1.5 V LR6(AA)
Weight	: 0.49 kg













Capacity

Laser Diode : <10mW Working Range : 20 m

(50m with Receiver LR 7) Working Range of

plumb dots : 10 m (up and down) Leveling Accuracy : ± 0.3 mm / m Self-levelling Range: ± 4° Tripod Mount : 1/4" : 3 x 1.5 V LR6 (AA) Batteries

Weight : 0.6 kg

Surface Laser

*GSL 2

GLL 3-15 X









GLL 3-80 P

3

Capacity

Receiver Leveling Accuracy

Batteries

Voltage

Weight

Plane

Laser Diode

Working Range

Working Range With



: 640 nm, <1mW

: 20 m

: 80 m

: 6 VDC

: 0.76 kg

: 3

: ± 0.2 mm / m

: 4 x 1.5 V LR6(AA)







Capacity

Cupacity	
Working Range	: 10 m
Working Range Wit	h
Target Plate	: 20 mm
Levelling Accuracy	: 0.3 mm/m
Self-levelling Range	e: ± 4°
Batteries	: 10.8 V Li -l on /
	4 x 1.5 V (AA)
Weight	: 1.4 kg

(N) Capacity

Laser Diode	: 630 - 650 nm, <1mW
Working Range	: 15 m
Leveling Accuracy	: ± 0.2 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

Spare Parts

1 618 101 11X Stand



Capacity

Working Range	: 15 m
Working Range With	
Receiver	: 5 - 50 m
Leveling Accuracy*	: ± 0.2 mm / m
Self-levelling Range	: ± 3°
Tripod Mount	: 5/8"
Batteries	: 4 x 1.5 V LR6(AA)
Weight	: 0.5 kg

Spare Parts

1 618 101 11X Stand

GLL 8-40 E

GPL 5

GCL 25



Capacity

Laser Diode : 635 - 650 nm, <1mW : 15 m Working Range Working Range With Receiver : 40 m Leveling Accuracy $:\pm 0.1 \text{ mm} / \text{m}$

Self-levelling Range : ± 3° : 4 x 1.5 V LR6(AA) Batteries

Weight : 1.1 kg



Capacity

Laser Diode : 635 - 650 nm, <1mW Working Range : 15 m Working Range With Receiver : 40 m

Leveling Accuracy : \pm 0.1 mm / m Self-levelling Range : ± 3°

Batteries Weight : 1.1 kg

: 4 x 1.5 V LR6(AA)



Capacity

Laser Diode : 635 nm, <1mW : 30 m : ± 3° / ± 5° Working Range Self-leveling range Leveling Accuracy : ± 0.3 mm : 3 x 1.5 V LR6(AA) Batteries Voltage : 5 VDC Weight : 0.25 kg





Capacity

Working Range : 10 m Levelling Accuracy : 0,3 mm/m Self-levelling Range : ± 4° : 4 x 1.5 V LR06(AA) Batteries : 1/4" & 5/8" Tripod Connection : 0.6 kg Weight

Optical Level

Capacity

Unit of Measure

Levelling Accuracy

Magnification

Working Range

Field Of View

Weight

GOL 26 D Set + GR 500 + BT 160

GOL 32 D Set + GR 500 + BT 160



GRL 300 HVG



GAM 220





: 1.6 mm / 30 m

: 360°

: 100 m

: 1° 20'

: 1.7 kg

. 26x



Unit of Measure	: 360°
Magnification	: 32x
Levelling Accuracy	: 1 mm / 30 m
Working Range	: 120 m
Clear Objective Aperture	: 36 mm
Field Of View	: 1° 30'
Weight	: 1.7 kg





Capacity Laser Diode : 532 nm, <5mW

Working Range With : 150 m (radius) Receiver Leveling Accuracy : ± 0.1 mm / m Batteries : 2 x 1.5V LR20(D) : 3 VDC Voltage Weight : 1.8 kg



Capacity

Measurement Range : 0 - 220° Electronics Measurement : ±0.1° Accuracy, Angles Electronics Measurement Accuracy, Vials : ±0.05° : 4 x 1.5V LR6(AAA) Power Supply Voltage : 6 VDC : 1.2 kg Weight

Digital Inclinometer

Clear Objective Aperture: 36 mm



Capacity

Measurement Range	: 0° - 360°
Electronics Measurement	
Accuracy 0°/90°	: ±0.05°
Electronics Measurement	
Accuracy at 1°/89°	: ±0.2°
Laser Working Range	: 30 m
Laser Accuracy	: ±0.5 mm/m
Batteries	: 1 x 9V (Laser)
	x 1.5V (AAA)
Voltage	: 9 VDC
Weight	: 0.9 kg

GIM 60



Capacity

Measurement Range : 0-360° Electronics Measurement Accuracy 0°/90° : ±0.05° Electronics Measurement Accuracy at 1°/89° : ±0.2° Electronics Measurement Accuracy, Vials : ±0.057° = ±1 mm/m Power Supply : 1 x 9 V 6LR61 : 9 VDC Voltage Weight : 0.7 kg

GIM 120



Capacity

Measurement Range : 0-360° (4x90°) Electronics Measurement Accuracy 0°/90° : ±0.05° Electronics Measurement Accuracy at 1°/89° : ±0.2° Electronics Measurement Accuracy, Via**l**s : ±0.057° = ±1 mm/m Power Supply : 1 x 1.5 V LR6(AA) : 9 VDC Voltage Weight : 1.4 kg

Tripod

BT 150




Capacity Work Height : 52 - 147 cm Tripod Thread : 1/4" : 1.3 kg Weight

For DLE, GLM, GLL & GPL category

BT 150 (%") BT 160 BT 170 HD *BT 300 HD







Capacity	
Work Height	: 97 - 160 cm
Tripod Thread	: 5/8" x 11
Weight	: 4.1 kg
For GRL & GOL category	



 Capacity

 Work Height
 : 107 · 165 cm

 Tripod Thread
 : 5/8" x 11

 Weight
 : 5.5 kg

 For GRL & GOL category

Measuring Rail



Capacity
Work Height : 122 - 295 cm
Tripod Thread : 1/4"
Weight : 7.5 kg
For GCL, GLL & GLM category

Telescopic Pole

Laser Receiver

LR 1 LR 2



 Capacity

 Working Range
 : 150 m

 Measurement Accuracy, Fine
 : 1 mm

 Measurement Accuracy, Rough
 : 3

 Power Supply
 : 1 x 9 V 6LR61

 Voltage
 : 9 VDC

 Weight
 : 0.36 kg

 For GRL category



Capacity	
Working Range	: 5 - 80 m
Measurement Accuracy,	Fine : 1 mm
Measurement Accuracy,	Rough : 3
Power Supply	: 1 x 9 V 6LR61
Vo l tage	: 9 VDC
Weight	: 0.2 kg
For GLL category	



Capacity	
Comes complete with	: Protective Case,
Charger, Manufacturer'	's Certificate
Measuring Range	: 0 - 360°
Accuracy of inclinomete	r: ± 0.2°
Audible Signals	: at 0° and 90°
Dimensions (L/W/H)	: 610 x 58 x 30 mm
For GLM 80	

Universal Holder

BM 1



Capacity	
Max Height	: 140 - 350 cm
Weight	: 2.5 kg
For GLL & GPL category	

Optical Level Measuring Rod

*GR 240 GR 500



Capacity	
Working Range	: 2 m
Weight	: 1.3 kg
For GOL 26 D	



Capacity	
Length	: 500 cm
Unit Of Measure	: m / cm
Weight	: 1.98 kg
For GOL 26 D	



Capacity	
Tripod Thread	: 1/4"
Weight	: 0.5 kg
For GLL, GPL & GLM category	

High Pressure Washer



Japacity	
Motor Power	: 1,300 W
Pressure	: 110 bar
low Rate	: 330 I /h
Лах. Temp	: 40°C
Veight	: 4.5 kg

Spare Parts	
Trigger	F 016 F04 796
Hose (6m)	F 016 800 360
Evtension Hose (6m)	F 016 800 361
Lance	F 016 F04 462
3 in 1 Nozz l e	F 016 800 352

High Pressure Washer (Suitable for Home Use)

EasyAquatak 120



Capacity

Motor Power	: 1,500 W
Pressure	: 120 bar
Flow Rate	: 350 l/h
Max. Temp	: 40°C
Woight	. 5 kg

Spare Parts

Handle	F 016 F04 796
Hose	F 016 800 360
Lance	F 016 F04 462

AQT 35-12 PLUS



oupuoity	
Motor Power	: 1,500 W
Pressure	: 120 bar
Flow Rate	: 350 l/h
Max. Temp	: 40°C
Weight	· 5 53 kg

Spare Parts

Trigger	F 016 F04 464
Hose (6m)	F 016 800 360
Evtension Hose (6m)	F 016 800 361
Lance	F 016 F04 462
3 in 1 Nozzle	F 016 800 352

UniversalAquatak 125





Capacity

Motor Output	: 1,500 W
Pressure	: 125 bar
Flow Rate	: 360 l/h
Max. Temp	: 40°C
Weight	: 6.8 kg

UniversalAquatak 130





Capacity

Motor Output	: 1,700 W
Pressure	: 130 bar
Flow Rate	: 380 I /h
Max. Temp	: 40°C
Weight	: 7.8 kg



Capacity	
Motor Output	: 1,700 W
Pressure	: 130 bar
Flow Rate	: 370 I /h
Max. Temp	: 40°C
Weight	: 6.53 kg

Spare Parts

Trigger	F 016 F04 464
Hose (6m)	F 016 800 360
Evtension Hose (6m)	F 016 800 361
Lance	F 016 F04 462
3 in 1 Nozzle	F 016 800 352

AQT 45-14 X



Capacity

Motor Output	: 2,100 W
Pressure	: 140 bar
Flow Rate	: 450 I /h
Max. Temp	: 40°C
Weight	: 17.6 kg

Spare Parts

Trigger	F 016 F04 633
Hose (8m)	F 016 F04 667
Lance	F 016 F04 462
3 in 1 Nozzle	F 016 800 352

AdvancedAquatak 160



Capacity

: 2,600 W
: 160 bar
: 570 l /h
: 40°C
: 23.4 kg

High Pressure Cleaner

GHP 5-13 C



Capacity

Motor Power	: 2,300 W
Maximum Pressure	: 140 Bar
Maximum Flow Rate	: 520 I/h
Hose Length	: 8 m
Weight	: 16.5 kg

Spare Parts

	_
Handle	F 016 L72 097
Jet Pipe	F 016 L72 098
Hose (9m)	E 016 E04 523

GHP 5-55



Capacity

Motor Power	: 2,200 W
Maximum Pressure	: 130 Bar
Maximum Flow Rate	: 520 I/h
Hose Length	: 8 m
Woight	. 10 kg

Spare Parts

Handle	F 016 L73 068
Jet Pipe	F 016 L73 069

GHP 5-65



Capacity

Motor Power	: 2,400 W
Maximum Pressure	: 160 Bar
Maximum Flow Rate	: 520 I/h
Hose Length	: 10 m
Weight	. 24 kg

Spare Parts Handle F 016 L73 068

GHP 5-75



Capacity	
Motor Power	: 2,600 W
Maximum Pressure	: 185 Bar
Maximum Flow Rate	: 570 I/h
Rated Pressure	: 140 Bar
Weight	. 26 7 kg

Spare Parts Handle F 016 L73 068

GHP 6-14



Capacity

: 2,600 W
: 150 Bar
: 650 I/h
: 10 m
: 25.6 kg

Handle	F 016 L72 097
Jet Pipe	F 016 L72 179
Hose (9m)	F 016 F04 523

Bosch 110V Power Tools

Model	Description		
GBH 2-23 RE	Rotary Hammer SDS Plus		
GBH 2-26 RE	Rotary Hammer SDS Plus		
GBH 5-40 D	Rotary Hammer SDS Max		
*GBH 8-45 D	Rotary Hammer SDS Max		
GBL 800 E	Blower		
GCO 2000	Cut Off Saw		
*GDM 13-34	Marble Cutter		
GDS 18 E	Impact Wrench		
GGS 28 LC	Straight Grinder		
GHG 630 DCE	Heat Gun		
*GHO 10-82	Planer		
*GSA 1100 E	Sabre Saw		
GSB 10 RE	Impact Drill, 10 mm Chuck		
GSB 16 RE	Impact Drill, 13 mm Chuck		
*GSB 21-2 RE	Impact Drill, 13 mm Chuck		
GSH 5 X Plus	Breaker (17 mm Hex Shank)		
*GSH 5 CE	Breaker SDS Max		
GST 65	Jigsaw		
GWS 6-100	4" Grinder (100+6)		
GWS 8-100 Z	4" Grinder Paddle / DMS		
*GWS 11-125	5" Grinder		
*GWS 11-125 P	5" Grinder Paddle / DMS		
GWS 20-180	7" Grinder		
GWS 22-230 H	9" Grinder		

Note: Items marked '*' are on Indent Order Basis.

Carbon Brush Guidelines

Effective 1st January 2017

Model No.			Carbon Brush Part No.	Price (S\$)
GAS 11-21			1 609 203 A00	15.00
GBH 2-20 RE	GHO 10-82	GBS 75 A	1 607 031 222 (replacing 2 604 321 905)	5.50
GBH 2-24 RE / DRE	GBH 2-23 RE	GBH 2-26 RE / DFR	1 001 001 222 (replanting 2 00 1 021 000)	0.00
GBH 3-28 DFR	GBH 2-23 REA	GSB 20-2 RE (New)	1 617 000 525	8.00
GBH 2-26 RE	GBH 2-26 DRE	GBH 2-26 E	1 607 014 116 (replacing 1 607 031 226)	6.00
GBH 36 V-LI	GDITZ ZO DITE	ODITZ ZO L	1 617 014 142	9.00
GBH 4-32 DFR			1 614 321 079	12.00
GBH 8-45 D		GSH 9 VC	1 617 000 A50	16.00*
GBH 7-45 DE	GBH 7-46 DE	03113 VC	1 617 014 135	15.90
GBH 24 VRE	GBH 7-40 DL		1 617 014 131	5.50
GBH 24 VNL	GBH 2-20 SRE		1 607 031 230 (replacing 1 617 014 127)	6.00
	GBH 4 DFE		1 617 014 124	
GBH 4 DSC	GBH 4 DFE			8.00
GBH 3-28 E	00115.05	0011.4	1 617 014 137	12.50
GBH 5 DCE	GSH 5 CE	GSH 4	1 607 031 225 (replacing 1 617 014 122)	12.50
GBL 800	GBL 800 E		1 604 321 129	8.00
GBM 16-2 RE (Old)	GBM 23-2 RE	GGS 6 S	3 607 014 012	24.00
GCM 10 M	GCO 14-24 J / 2000	GCD 12 JL	1 607 014 171 (replacing 1 607 014 154)	10.00
GCM 10 S			1 609 203 L02	15.00
GCM 10 MX			1 619 PA7 057	26.50
GCM 10			1 619 P04 451	20.00
GDM 121			1 619 PA4 025	3.10
GDM 13-34			1 619 P06 304	5.00
GDS 18 E			1 619 PA2 438	11.00
GDR 14.4 V-LI	GDX 18 V-LI	GDS 18 V-LI	2 609 199 169	9.50
GEX 125-1 AE	GSS 230		2 609 120 199	9.65
GGS 28 C / LC	GPO 12 CE		1 607 014 176 (replacing 1 607 014 172)	7.00
GGS 3000 L	GWS 6-100	GWS 060		
GGS 5000 L	GWS 750-100	GWS 8-100 C / CE	1 607 031 223 (replacing 1 607 014 145)	2.80
GKS 7000			1 619 P10 063	6.00
GKS 190 (New)			1 619 P06 346	9.90
GKS 190 (Old)			1 619 P01 317	8.20
GMR 1			2 609 120 149	9.70
GSA 1100 E	GSA 1300 PCE		2 610 956 917	5.00
GSB 16 RE (Old) (700W)	33712333132		2 604 337 059 C/W B. Holder	9.00
GSB 16 RE (New) (750W)	GBM 10 RE / 13 RE	GSB 10 RE / 13 RE	2 610 391 290 (replacing 2 604 321 917)	6.50#
GSB 16 RE (Oldest)	GBM 13 HRE	GSB 20-2	1 607 031 222 (replacing 2 604 321 917)	5.50
GSG 300	ODW 13 TINE	G3D 20 2	1 607 014 17J (replacing 2 604 320 911)	8.00
GSH 11 E	GSH 16-30		1 617 014 126	10.00
GSH 388 / X	GBH 5-38 D	GSH 5	1 017 014 120	10.00
GSH 5 X	GBH 5-40 D	GSH 5 CE	1 617 014 138	10.00#
	GBH 3-40 D	GSH 5 CE		
GSR 36 V-LI	000 07	000 07 1	2 607 034 904	11.00
GST 80 PBE	GGS 27	GGS 27 L	1 007 004 000	2.00
GST 25 M	GST 60 PBE	GNA 2.0	1 607 031 228 (replacing 2 604 320 912)	6.20
GST 54			1 607 031 239 (replacing 2 604 321 904)	6.20
GST 65			2 604 321 919	6.00
GWS 7-100	GWS 7-100 T / ET	GPO 250 CE	1 619 P02 870	2.80
GWS 8-100 Z	GWS 12-125 CI	GWS 11-125 CI	1 607 014 176 (replacing 1 607 014 172)	7.00
GWS 12-125 CI	GWS 13-125 CI	GWS 15-150 CI	1 607 000 V37	7.50*
GWS 20-180	GWS 20-230	GCO 200	1 607 014 171 (replacing 1 607 014 154)	10.00
			DREMEL	
3000	300		2 615 298 790	6.30

[#] Price reduction



WARRANTY

This serves to inform all Bosch Power Tools are guaranteed against manufacturing defects for a period of 6 months from the registered date of purchase (Bosch Measuring Tools, GHP Range High Pressure Cleaners and HEAVY DUTY Range Power Tools are entitled to 1 Year Warranty, except Bosch Hot Air Guns, Bosch Batteries and Bosch Chargers which are entitled to 6 months warranty. Terms and Conditions apply).

This guarantee, however, does not cover damage caused by accident, misuse, unauthorised repairs, tampering, additions and modifications made to the tool in any manner.

保证

谨此通知阁下有关所有博世电动工具享有为期六个月之生产损坏保证,有效期从购买登记日算起. (博世电子测量器,博世 GHP 高压清洗机系列及博世 HEAVY DUTY 系列享有1年保证,除了博世热风机,博世电池和博世充电器享有6个月保证. 附带条规).

无论如何,上述保证并不包括有关电动工具因意外,错误使用、非授权维修、附加及修换或其他方式所造成的损坏及故障.



For further enquiries, please call **1 800 333 8 333**Mon - Fri 8.30am - 5.30pm
www.bosch-pt.com.sg

Key To Symbols



Double Insulation



Electronic Control



Rotation Stop



Constant Electronic



Forward / Reverse Rotation



Overload Clutch







Saw Blade Pendulum Action



Dust Extraction



Bosch SDS System





Slim Grip





SDS-Max Tool Holder



SDS-Plus Quick Exchange System



SDS-Max Quick Exchange System



SDS-Clic Quick Clamping System



Velcro Fastening



Inox
For a perfect
finish on
stainless steel



Easy Fit



Turbo Blower



Removable Cable



Torque Control



Restart Protection



Fine Depth Adjustment



Direct Cooling and Additional Air Inlets



Kick Back Stop













While all care has been taken to ensure that the information contained in this publication is correct, no responsibility can be accepted for any inaccuracy.







BOSCH





For tools with 6-months warranty full warranty applies for purchases from 1st July 2017 onwards.

Terms and Conditions apply. Bosch reserves the right to amend the terms and conditions or withdraw the promotion at its sole discretion without prior notice. * For tools with 6-months warranty



Robert Bosch (SEA) Pte Ltd
11 Bishan Street 21
Singapore 573943
Tel: (65) 6571 2772
Fax: (65) 6571 2784

For further enquiries, please contact



Authorised Service Centre: **Powerwell Service Centre Pte Ltd**4012 Ang Mo Kio Ave 10,
#01-02 Techplace 1, Singapore 569628
Tel: (65) 6452 1770
Fax: (65) 6452 1760
Email: ask@powerwellsc.com