



The Best Industrial Hoses Solution

PAPAGENO, Perfect Every Detail



PVC HOSES & HOSE FITTINGS

PAPAGENO INDUSTRY CO., LIMITED

Light Duty PVC Layflat Hose

Inner Diameter: 3/4"~14"

Working Pressure: 2 bar, 4 bar

Standard Length: 100 m/roll

Technology: Extrusion.

Temperature Ranges: -5~65°C(23~149°F)

Applications: Irrigation, Gardening, Mines, Construction etc.



Part No.	Inch Size	I.D	O.D	Thickness	W.P.	B. P.	Length	Weight	Volume
	inch	mm	mm	mm	bar	bar	m/roll	kg/m	m³/roll
GNSD2604	1"	26	28.6	1.30	4.0	12.0	100	0.15	0.022
GNSD3304	1-1/4"	33	35.4	1.20	4.0	12.0	100	0.17	0.025
GNSD4105	1-1/2"	41	43.5	1.25	5.0	15.0	100	0.21	0.028
GNSD5304	2"	53	55.0	1.00	4.0	12.0	100	0.23	0.032
GNSD6604	2-1/2"	66	68.3	1.15	4.0	12.0	100	0.32	0.049
GNSD7804	3"	78	80.1	1.05	4.0	12.0	100	0.36	0.057
GNSD10404	4"	104	106.4	1.20	4.0	12.0	100	0.55	0.090
GNSD12804	5"	128	130.7	1.35	4.0	12.0	100	0.75	0.102
GNSD15504	6"	155	157.7	1.35	4.0	12.0	100	0.90	0.120
GNSD20703	8"	207	211.4	2.20	3.0	9.0	100	1.79	0.212
GNSD20704	8"	207	212.3	2.65	4.0	12.0	100	2.02	0.234
GNSD25702	10"	257	262.3	2.65	2.5	7.5	50	2.65	0.177
GNSD30802	12"	308	313.1	2.55	2.0	6.0	50	2.91	0.210
GNSD36502	14"	365	371.4	3.20	2.0	6.0	30	5.10	0.261

Standard Duty PVC Layflat Hose

Inner Diameter: 3/4"~8"

Working Pressure: 6 bar, 7 bar

Standard Length: 100 m/roll

Technology: Extrusion.

Temperature Ranges: -5~65°C(23~149°F)

Applications: Irrigation, Gardening, Mines,
Construction etc.



Standard Duty PVC Layflat Hose

Part No.	Inch Size	I.D	O.D	Thickness	W.P.	B. P.	Length	Weight	Volume
	inch	mm	mm	mm	bar	bar	m/roll	kg/m	m³/roll
GNSD2007	3/4"	20	22.7	1.35	7.0	21.0	100	0.11	0.016
GNSD2607	1"	26	29.0	1.50	7.0	21.0	100	0.17	0.023
GNSD3307	1-1/4"	33	35.6	1.30	7.0	21.0	100	0.19	0.028
GNSD4107	1-1/2"	41	43.9	1.45	7.0	21.0	100	0.23	0.031
GNSD4508	1-3/4"	45	48.2	1.60	8.0	24.0	50	0.32	0.021
GNSD5306	2"	53	55.6	1.30	6.0	18.0	100	0.30	0.039
GNSD5308	2"	53	56.0	1.50	8.0	24.0	50	0.35	0.026
GNSD6607	2-1/2"	66	69.4	1.70	7.0	21.0	100	0.43	0.057
GNSD7806	3"	78	80.9	1.45	6.0	18.0	100	0.50	0.069
GNSD10406	4"	104	108.6	2.30	6.0	18.0	100	0.87	0.107
GNSD12806	5"	128	132.6	2.30	6.0	18.0	100	1.08	0.134
GNSD15506	6"	155	159.8	2.40	6.0	18.0	100	1.60	0.183
GNSD20705	8"	207	212.9	2.95	5.0	15.0	50	2.20	0.135

Heavy Duty PVC Layflat Hose

Inner Diameter: 3/4"~8"

Working Pressure: 9 bar, 10 bar

Standard Length: 50 m/roll

Technology: Extrusion.

Temperature Ranges:-5~65°C(23~149°F)

Applications: Irrigation, Gardening, Mines, Construction etc.



Part No.	Inch Size	I.D	O.D	Thickness	W.P.	B. P.	Length	Weight	Volume
	inch	mm	mm	mm	bar	bar	m/roll	kg/m	m³/roll
GNSD20105	3/4"	20	23.1	1.55	10.5	31.5	50	0.14	0.010
GNSD26105	1"	26	29.4	1.70	10.5	31.5	50	0.20	0.014
GNSD33105	1-1/4"	33	35.9	1.45	10.5	31.5	50	0.21	0.014
GNSD41105	1-1/2"	41	44.8	1.90	10.5	31.5	50	0.29	0.020
GNSD45105	1-3/4"	45	49.0	2.00	10.5	31.5	50	0.35	0.022
GNSD53105	2"	53	57.1	2.05	10.5	31.5	50	0.42	0.029
GNSD66105	2-1/2"	66	70.3	2.15	10.5	31.5	50	0.54	0.043
GNSD7809	3"	78	82.5	2.25	9.0	27.0	50	0.66	0.050
GNSD7810	3"	78	83.0	2.50	10.0	30.0	50	0.85	0.054
GNSD10409	4"	104	109.1	2.55	9.0	27.0	50	1.00	0.071
GNSD15506	6"	155	161.0	3.00	6.0	18.0	50	2.00	0.120
GNSD20706	8"	207	213.3	3.15	6.0	18.0	50	2.80	0.172


PVC Braided Hose

Inner Diameter: 1/4"~3"

Standard Length: 50 m/roll, 100 m/roll

Temperature Ranges:-5~65°C(23~149°F)

Applications: Gardening & Construction etc.

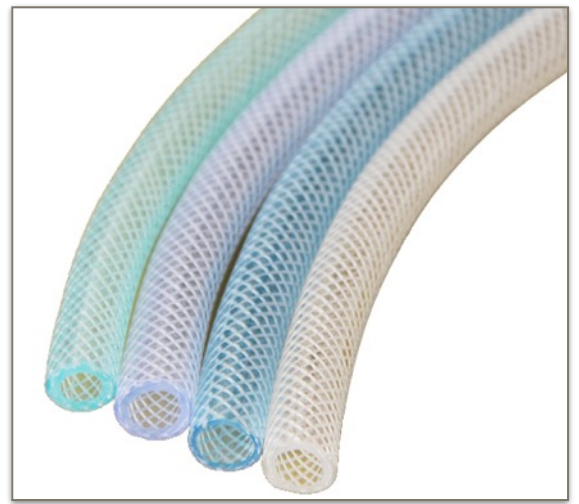

Part No.	Inch Size	I.D (mm)	O.D (mm)	W.P (bar)	B.P (bar)	Length (m/roll)	Weight (kg/roll)
GNXWG0610	1/4"	6	10	10	30	100	6.60
GNXWG0612	1/4"	6	12	10	30	100	11.10
GNXWG0812	5/16"	8	12	10	30	100	8.20
GNXWG0914	3/8"	9	14	9	27	100	11.80
GNXWG1216	1/2"	12	16	7	21	100	11.50
GNXWG1218	1/2"	12	18	9	27	100	18.50
GNXWG1317	1/2"	13	17	6	18	100	12.30
GNXWG1319	1/2"	13	19	8	24	100	19.70
GNXWG1519	5/8"	15	19	6	18	50	7.00
GNXWG1521	5/8"	15	21	8	24	50	11.10
GNXWG1620	5/8"	16	20	5	15	50	7.40
GNXWG1622	5/8"	16	22	8	24	50	11.70
GNXWG1924	3/4"	19	24	4	12	50	11.10
GNXWG1925	3/4"	19	25	7	21	50	13.60
GNXWG1926	3/4"	19	26	8	24	50	16.20
GNXWG2025	3/4"	20	25	6	18	50	11.60
GNXWG2026	3/4"	20	26	6	18	50	14.20
GNXWG2027	3/4"	20	27	7	21	50	16.90
GNXWG2531	1"	25	31	5	15	50	17.30
GNXWG2532	1"	25	32	5	15	50	20.50
GNXWG2533	1"	25	33	6	18	50	23.90
GNXWG3239	1-1/4"	32	39	4	12	40	20.40
GNXWG3240	1-1/4"	32	40	5	15	40	23.70
GNXWG3845	1-1/2"	38	45	4	12	40	23.90
GNXWG3846	1-1/2"	38	46	4	12	40	27.60
GNXWG3848	1-1/2"	38	48	4	12	40	35.40
GNXWG4555	1-3/4"	45	55	4	12	30	30.90
GNXWG5058	2"	50	58	3	9	30	26.70
GNXWG5059	2"	50	59	4	12	30	30.30
GNXWG5060	2"	50	60	4	12	30	33.90
GNXWG6478	2-1/2"	64	78	4	12	25	51.50
GNXWG7590	3"	75	90	4	12	20	51.00

PVC Steel Wire Hose

Inner Diameter: 1/4"~10"

Standard Length: 50 m/roll, 30m/roll, 100 m/roll

Temperature Ranges:-5~65°C(23~149°F)

Applications: Irrigation, Oil & Construction etc.

Special Purpose Customized Hose:

- Food Hose
- High Temperature
- Low Temperature
- Anti-static



Part No.	Inch Size	I.D (mm)	O.D (mm)	Thickness (mm)	W.P (bar)	B.P (bar)	Length (m/roll)	Weight (kg/m)
GNGSG0611	1/4 "	6	11	2.5	-0.1-1.1	3.3	100	0.115
GNGSG0814	5/16"	8	14	3.0	-0.1-1.1	3.3	100	0.170
GNGSG0915	3/8 "	9	15	3.0	-0.1-1.1	3.3	100	0.185
GNGSG1016	3/8 "	10	16	3.0	-0.1-1.1	3.3	100	0.200
GNGSG1015	3/8 "	10	15	2.5	-0.1-1.0	3.0	100	0.160
GNGSG1218	1/2 "	12	18	3.0	-0.1-1.0	3.0	100	0.220
GNGSG1217	1/2 "	12	17	2.5	-0.1-0.9	3.0	100	0.170
GNGSG1522	5/8 "	15	22	3.5	-0.1-1.0	3.0	100	0.320
GNGSG1521	5/8 "	15	21	3.0	-0.1-0.9	3.0	100	0.260
GNGSG1620	5/8 "	16	20	2.0	-0.1-0.8	2.0	100	0.180
GNGSG1623	5/8 "	16	23	3.5	-0.1-0.8	3.0	100	0.350
GNGSG1926	3/4 "	19	26	3.5	-0.1-1.0	3.0	50	0.390
GNGSG1925	3/4 "	19	25	3.0	-0.1-0.8	2.0	100	0.320
GNGSG2026	3/4 "	20	26	3.0	-0.1-0.8	2.0	50	0.320
GNGSG2025	3/4 "	20	25	2.5	-0.1-0.8	2.0	50	0.290
GNGSG2533	1"	25	33	4.0	-0.1-1.0	2.5	50	0.540
GNGSG2532	1"	25	32	3.5	-0.1-0.7	2.0	50	0.500
GNGSG3238	1-1/4"	32	38	3.0	-0.1-0.5	1.9	50	0.600
GNGSG3241	1-1/4"	32	41	4.5	-0.1-0.6	2.0	50	0.810
GNGSG3844	1-1/2"	38	44	3.0	-0.1-0.5	1.6	50	0.600
GNGSG3845	1-1/2"	38	45	3.5	-0.1-0.5	1.6	50	0.700
GNGSG3846	1-1/2"	38	46	4.0	-0.1-0.6	1.8	50	0.900
GNGSG4553	1-3/4"	45	53	4.0	-0.1-0.5	1.6	50	1.000
GNGSG4858	1-7/8"	48	58	5.0	-0.1-0.5	1.6	40	1.400

Part No.	Inch Size	I.D (mm)	O.D (mm)	Thickness (mm)	W.P (bar)	B.P (bar)	Length (m/roll)	Weight (kg/m)
GNGSG5058	2"	50	58	4.0	-0.1-0.5	1.4	50	1.200
GNGSG5060	2"	50	60	5.0	-0.1-0.5	1.5	50	1.400
GNGSG5870	2-5/16"	58	70	6.0	-0.1-0.5	1.5	40	2.000
GNGSG6475	2-1/2"	64	75	5.5	-0.1-0.4	1.0	40	2.000
GNGSG6476	2-1/2"	64	76	6.0	-0.1-0.4	1.0	40	2.350
GNGSG7591	3"	75	91	8.0	-0.1-0.5	1.3	30	3.500
GNGSG7587	3"	75	87	6.0	-0.1-0.4	1.0	40	2.500
GNGSG90108	3-1/2"	90	108	9.0	-0.1-0.4	1.2	20	4.500
GNGSG102112	4"	102	112	5.0	-0.1-0.3	1.0	30	3.000
GNGSG102114	4"	102	114	6.0	-0.1-0.3	1.0	30	3.500
GNGSG102115	4"	102	115	6.5	-0.1-0.3	1.0	30	4.000
GNGSG110123	4-3/8"	110	123	6.5	-0.1-0.3	1.0	20	4.000
GNGSG127143	5"	127	143	8.0	-0.1-0.3	1.0	20	6.000
GNGSG140156	5-1/2"	140	156	8.0	-0.1-0.3	1.0	10	6.500
GNGSG152170	6"	152	170	9.0	-0.1-0.3	1.0	10	8.500
GNGSG160176	6-5/16"	160	176	8.0	-0.1-0.3	1.0	10	8.500
GNGSG180196	7"	180	196	8.0	-0.1-0.3	1.0	10	8.500
GNGSG200224	8"	200	224	12.0	-0.1-0.3	1.0	10	12.000
GNGSG250278	10"	250	278	14.0	-0.1-0.3	1.0	30	19.000


Vinyl Tubing

Inner Diameter: 3/16"~2"

Standard Length: 40/50 m/roll, 100 m/roll

Temperature Ranges:-5~65°C(23~149°F)

Applications: Aquaculture & Sanitary.

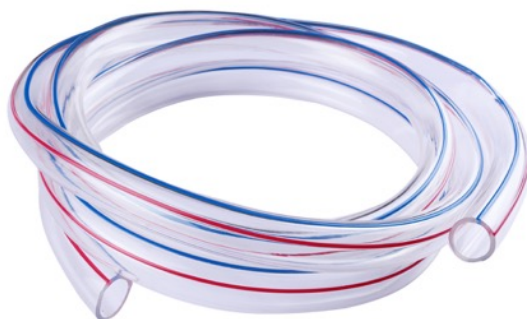

Part No.	Inch Size	I.D (mm)	O.D (mm)	Thickness (mm)	W.P (bar)	Length (m/roll)	weight (kg/m)
GNLTG0508	3/16"	5	8	1.50	0.25	100	0.04
GNLTG0608	1/4"	6	8	1.00	0.15	100	0.029
GNLTG0810	5/16"	8	10	1.00	0.15	100	0.037
GNLTG1012	3/8"	10	12	1.00	0.15	50	0.045
GNLTG1215	1/2"	12	15	1.50	0.15	50	0.083
GNLTG1518	5/8"	15	18	1.50	0.15	50	0.101
GNLTG1923	3/4"	19	23	2.00	0.20	50	0.172
GNLTG2530	1"	25	30	2.50	0.20	50	0.281
GNLTG3238	1-1/4"	32	38	3.00	0.20	50	0.429
GNLTG3844	1-1/2"	38	44	3.00	0.20	40	0.502
GNLTG5058	2"	50	58	4.00	0.20	40	0.882

Three Layers PVC High Pressure Hose

Sizes: 1/4"~1"

Structure: Two layers PVC, one layer polyester braiding reinforcement.

Working Pressure: 15~25 bar

Temperature Ranges:-5~65°C(23~149°F)

Applications: Chemical, pesticide spraying hose



Part No.	Inch Size	I.D (mm)	O.D (mm)	W.P (Mpa)	B.P (Mpa)	Length (m/roll)	Weight (kg/roll)
GNGYG0612	1/4"	6.0	12.0	2.5	8.0	100	11.5
GNGYG065125	1/4"	6.5	12.5	2.5	8.0	100	12.0
GNGYG0814	5/16"	8.0	14.0	2.5	8.0	100	14.0
GNGYG85135	5/16"	8.5	13.5	2.0	7.0	100	11.8
GNGYG85145	5/16"	8.5	14.5	2.5	6.0	100	15.0
GNGYG0915	3/8"	9.0	15.0	2.0	6.0	100	15.5
GNGYG1016	13/32"	10.0	16.0	2.0	6.0	100	16.5
GNGYG1218	1/2"	12.0	18.0	2.0	6.0	100	19.0
GNGYG125195	1/2"	12.5	19.5	2.5	7.5	100	24.0
GNGYG1522	5/8"	15.0	22.0	2.0	6.0	50	14.0
GNGYG1926	3/4"	19.0	26.0	2.0	6.0	50	17.0
GNGYG1927	3/4"	19.0	27.0	2.0	6.0	50	20.0
GNGYG2533	1"	25.0	33.0	1.5	4.5	50	25.0

Five Layers PVC High Pressure Hose

Sizes: 1/4"~1"

Structure: Three layers PVC, two layers polyester braiding reinforcements.

Working Pressure: 15~40 bar

Temperature Ranges:-5~65°C(23~149°F)

Applications: Chemical, pesticide spraying hose

Colors: Yellow. Other colors are also available.



Part No.	Inch Size	I.D (mm)	O.D (mm)	W.P (Mpa)	B.P (Mpa)	Length (m/roll)	Weight (kg/roll)
GNSJLXG0814	5/16"	8.0	14.0	4.0	12.0	100	14.0
GNSJLXG85145	5/16"	8.5	14.5	4.0	12.0	100	15.0
GNSJLXG0916	3/8"	9.0	16.0	3.0	9.0	100	18.7
GNSJLXG1017	13/32"	10.0	17.0	3.0	9.0	100	20.0
GNSJLXG1219	1/2"	12.0	19.0	3.0	9.0	100	23.0
GNSJLXG1522	5/8"	15.0	22.0	2.0	6.0	50	14.0
GNSJLXG1926	3/4"	19.0	26.0	2.0	6.0	50	17.0
GNSJLXG1927	3/4"	19.0	27.0	2.0	6.0	50	20.0
GNSJLXG2533	1"	25.0	33.0	1.5	4.5	50	25.0

High Pressure Sprayer Hose Fittings



Model:

- Φ6.0, Φ 8.0 , Φ 8.5;
- Φ 9.0, Φ 10.0, Φ 12;
- Φ 15.0, Φ 19, Φ 25.

PVC Twin Welding Hose

- The bore of the two hoses could be same or different.
- Temperature range: --5~65°C(23~149°F)

Applications: For transporting oxygen acetylene for welding and cutting.



Part No.	Inch Size	I.D	O.D	W.P	B.P	Length	Weight
	Inch	mm	mm	Mpa	Mpa	m/roll	kg/roll
GNSLG0611	1/4"	6	12	3.0	9.0	50	11.5
GNSLG0813	5/16"	8	13	2.5	7.5	50	11.0
GNSLG0915	3/8"	9	15	2.5	7.5	50	15.0
GNSLG1016	3/8"	10	16	2.0	6.0	50	16.5
GNSLG1218	1/2"	12	18	2.0	6.0	50	19.0

PVC Garden Hose

Color: Inner black, outer green or yellow.

Temperature range: -5~65°C (23~149°F).

Applications: Garden watering.

Popular Sizes: 1/2", 5/8", 3/4" and 1"

Length: 10~50m/roll



Part No.	Inch Size	I.D (mm)	O.D (mm)	Thickness (mm)	W.P (bar)	Length (m/roll)	weight (kg/roll)
GNHYG1216	1/2"	12	16	2.0	5	100	11.5
GNHYG1217	1/2"	12	17	2.5	6	100	14.8
GNHYG1317	1/2"	13	17	2.0	6	100	12.5
GNHYG1318	1/2"	13	18	2.5	6	100	15.8
GNHYG1519	5/8"	15	19	2.0	5	50	7.2
GNHYG1520	5/8"	15	20	2.5	6	50	9.3
GNHYG1924	3/4"	19	24	2.5	5	50	11.0
GNHYG1925	3/4"	19	25	3.0	5	50	13.5
GNHYG2530	1"	25	30	2.5	3	50	14.0
GNHYG2531	1"	25	31	3.0	3	50	17.1

Crocheting PVC Garden Hose


Features: Anti kink.

Temperature range: -5~65°C (23~149°F).

Applications: Garden watering.


Popular Sizes: 1/2", 5/8", 3/4" and 1"

Length: 10~50m/roll

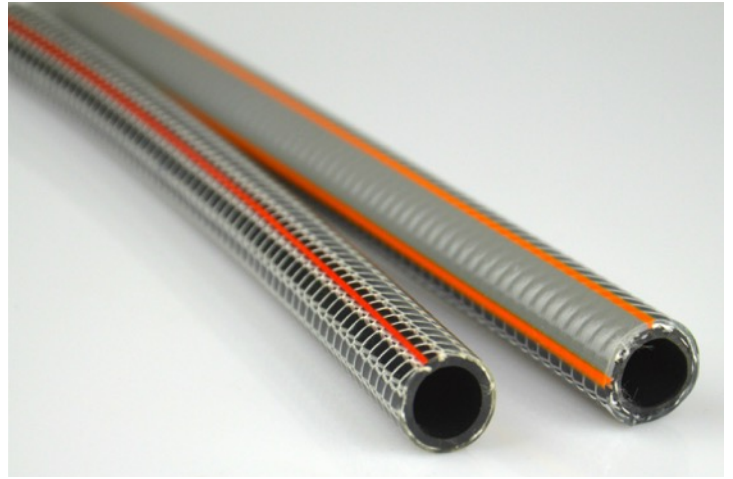

Part No.	Inch Size	I.D (mm)	O.D (mm)	Length (m)	W.P (bar)	B.P (bar)	Weight (kg/roll)
GNGBG1219	1/2"	12	17	50	8	25	7.5
GNGBG1522	5/8"	15	22	50	7	20	13.5
GNGBG1925	3/4"	19	25	50	6	18	14
GNGBG2531	1"	25	31	50	5	16	17.5

Light Duty PVC Suction Hose

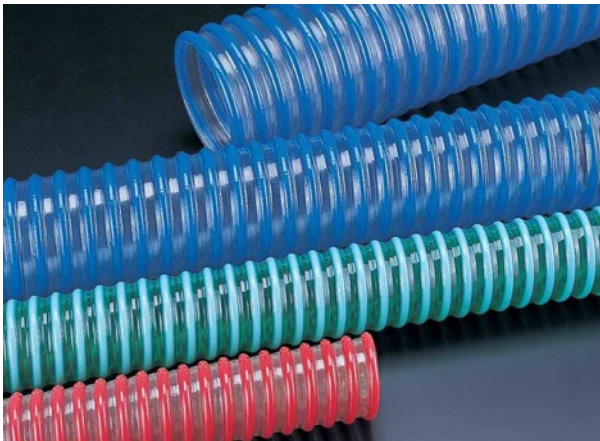

Features: Flexible, light weight, Anti-UV

Structure: Inner smooth, Outer corrugated.

Applications: Low pressure suction & discharge water, dust collection etc.

Part No.	Inch Size	I.D (mm)	O.D (mm)	W.P (bar)	Length (m/roll)	weight (kg/m)
GNTJG1923	3/4 "	19	23	6	30	0.23
GNTJG2529	1"	25	29	6	30	0.29
GNTJG3236	1-1/4"	32	36	6	30	0.35
GNTJG3844	1-1/2"	38	44	6	30	0.55
GNTJG5054	2"	50	54	5	30	0.55
GNTJG6369	2-1/2"	63	69	5	30	0.88
GNTJG7581	3"	75	81	4	30	1.16
GNTJG100108	4"	100	108	4	30	1.95
GNTJG125135	5"	125	135	4	30	3.00
GNTJG150162	6"	150	162	4	30	3.60
GNTJG200214	8"	200	214	3	30	6.30

Heavy Duty PVC Suction Hose

Features: High abrasion resistance, Anti-UV

Structure: Smooth inside and outside.


Applications: Water, oil suction & discharge

Temperatures: -5~65°C (23~149°F)



Sizes: 3/4" ~ 8"

Standard Length: 30 m/roll, 10m/pcs



Part No.	Inch Size	I.D (mm)	O.D (mm)	W.P (bar)	Length (m/roll)	Weight (kg/m)
GNPJG1925	3/4"	19	25	8	30	0.28
GNPJG2531	1"	25	31	8	30	0.35
GNPJG3240	1-1/4"	32	40	8	30	0.50
GNPJG3844	1-1/2"	38	44	8	30	0.75
GNPJG5058	2"	50	58	7	30	0.92
GNPJG6373	2-1/2"	63	73	6	30	1.30
GNPJG7585	3"	75	85	5	30	1.65
GNPJG100111	4"	100	111	5	30	2.55
GNPJG125137	5"	125	137	4	30	3.30
GNPJG150168	6"	150	168	5	10	6.30
GNPJG200216	8"	200	216	4	10	7.00

Hose Fittings

Aluminum Camlock:



Aluminum Camlock	
Type A, B,D,DC,DP	Type C, E
1/2"	1/2"
3/4"	3/4"
1"	1"
1-1/4"	1-1/4"
1-1/2"	1-1/2"
2"	2"
2-1/2"	2-1/2"
3"	3"
4"	4"
5"	5"
6"	6"
8"	8"
	10"
	12"

Stainless Camlock:



Type	Sizes
Stainless A, B, C,D, E, F, DC, DP	1/2"
	3/4"
	1"
	1-1/4"
	1-1/2"
	2"
	2-1/2"
	3"
	4"
	5"
	6"
	8"

Polypropylene Camlock:

Features: Multi-section Hose Shanks

Handles: Stainless steel or POM

Camlock body: Polypropylene



Polypropylene Camlock						
Type A	Type B	Type C	Type D	Type E	Type DC	Type DP
1/2"	1/2"	1/2"	1/2"	1/2"	1/2"	1/2"
3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
1"	1"	1"	1"	1"	1"	1"
1-1/4"	1-1/4"	1-1/4"	1-1/4"	1-1/4"	1-1/4"	1-1/4"
1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"	1-1/2"
2"	2"	2"	2"	2"	2"	2"
2-1/2"	2-1/2"	2-1/2"	2-1/2"	2-1/2"	2-1/2"	2-1/2"
3"	3"	3"	3"	3"	3"	3"
4"	4"	4"	4"	4"	4"	4"

Brass Camlock:



Type	Sizes
Brass A, B, C,D, E, F, DC, DP	1/2"
	3/4"
	1"
	1-1/4"
	1-1/2"
	2"
	2-1/2"
	3"
	4"
	5"
	6"
	8"

Hose Mender

	Carbon Steel	Aluminum	Stainless
	Size	Size	Size
	1/2"	1/2"	1/2"
	3/4"	3/4"	3/4"
	1"	1"	1"
	1-1/4"	1-1/4"	1-1/4"
	1-1/2"	1-1/2"	1-1/2"
	2"	2"	2"
	2-1/2"	2-1/2"	2-1/2"
	3"	3"	3"
	4"	4"	4"
	5"	5"	5"
	6"	6"	6"
	8"	8"	8"
	10"		
	12"		

Hose Storz Coupling

Aluminum Storz Coupling	Material	Size	Material	Size	Brass Storz Coupling
	Aluminum	1"	Brass	1"	
	Aluminum	1-1/2"	Brass	1-1/2"	
	Aluminum	1-3/4"	Brass	1-3/4"	
	Aluminum	2"	Brass	2"	
	Aluminum	2-1/2"	Brass	2-1/2"	
	Aluminum	3"	Brass	3"	
	Aluminum	4"	Brass	4"	
	Aluminum	6"	Brass	6"	

Pin Lug Couplings

Pin Lug Couplings		
Part No.	Thread	Inch Size
GNPLM150	NPSM	1-1/2"
GNPLT150	NST	1-1/2"
GNPLM200.	NPSM	2"
GNPLM250.	NPSM	2-1/2"
GNPLT250	NST	2-1/2"
GNPLM300	NPSM	3"
GNPLM400	NPSM	4"
GNPLM600	NPSM	6"



KC Nipples



Part No.	Inch Size
GNKCCS050	1/2"
GNKCCS075	3/4"
GNKCCS100	1"
GNKCCS125	1-1/4"
GNKCCS150	1-1/2"
GNKCCS200.	2"
GNKCCS250	2-1/2"
GNKCCS300	3"
GNKCCS400	4"
GNKCCS500	5"
GNKCCS600	6"
GNKCCS800	8"

Foot Valves



Part No.	Size
GNFV150	1-1/2"
GNFV200	2"
GNFV250	2-1/2"
GNFV300	3"
GNFV400	4"
GNFV600	6"
GNFV800	8"

Round Hole Strainers




Part No.	Size
GNGLZ150	1-1/2"
GNGLZ200	2"
GNGLZ250	2-1/2"
GNGLZ300	3"
GNGLZ400	4"
GNGLZ600	6"
GNGLZ800	8"

Hose Clamps

American Type



British Type

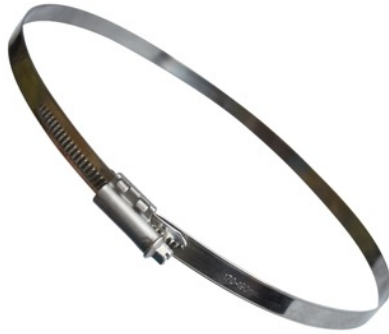

German Type



Double Nuts Clamps



Single Nut Clamps



T- Bolt Clamps



V Types Clamps



Double Bolts Clamps



Double Wires Clamps





PAPAGENO INDUSTRY CO., LIMITED is a professional exporter of industrial hoses. Our main products are: PVC hoses, Pneumatic Hoses, Fire Hoses, Garden Hoses, Irrigation Hoses, Industrial Hoses, Food Hoses, Hose Fittings & Clamps etc. We engage in the middle and high-end market because we only supply high quality products. By now we have established stable trade relations with more than forty countries and districts.

Our staffs of sales and technical support will try their best to help you in selecting the right products as per your requirements, free samples are available for your evaluation. We are committed to providing the highest level of customer service, competitive pricing, speedy delivery and a comprehensive, cutting-edge product offering. Our ultimate goal is your satisfaction.



Professional Team: Our team members are well-educated, professional, bilingual and experienced.

Efficient service: All your problems will be solved by a team, Update timely, fast reply, fast delivery.

Competitive price: We strictly control the costs and expenses to ensure low prices as well as high quality.

Fast Delivery: We have hundreds of production lines, enough stocks for normal size products.

Customized & OEM Service: The sizes and packages can be customized. We can print the logo, words brand as per customer's requirements.





PAPAGENO INDUSTRY CO.,LIMITED

OUR BUSINESS RANGES:

PVC Hoses, Pneumatic Hoses, Fire Hoses, Food Hoses, Industrial Hoses;
Hose Fittings & Clamps, Flexible Conduits & Cable Chains.

Contact US

Address: No.9 Juxing Road, Haihe Industrial Zone, Tianjin, China.

Tel: 86-22-28746855 **Mobile:** +86-13682102579

Fax: 86-22-28746963

Website: www.industrial-tubes.com (English)
www.industrial-tubes.es (Español)
www.industrial-tubes.com.pt (Português)
www.industrial-tubes.fr (Français)
www.industrial-tubes.ru (Русский)

Email: sales@industrial-tubes.com

ONLINE SERVICE

 tjppgn

 +8613682102579

 tjpapageno